



Revised Record

1.0 New Issue

2013-07-02

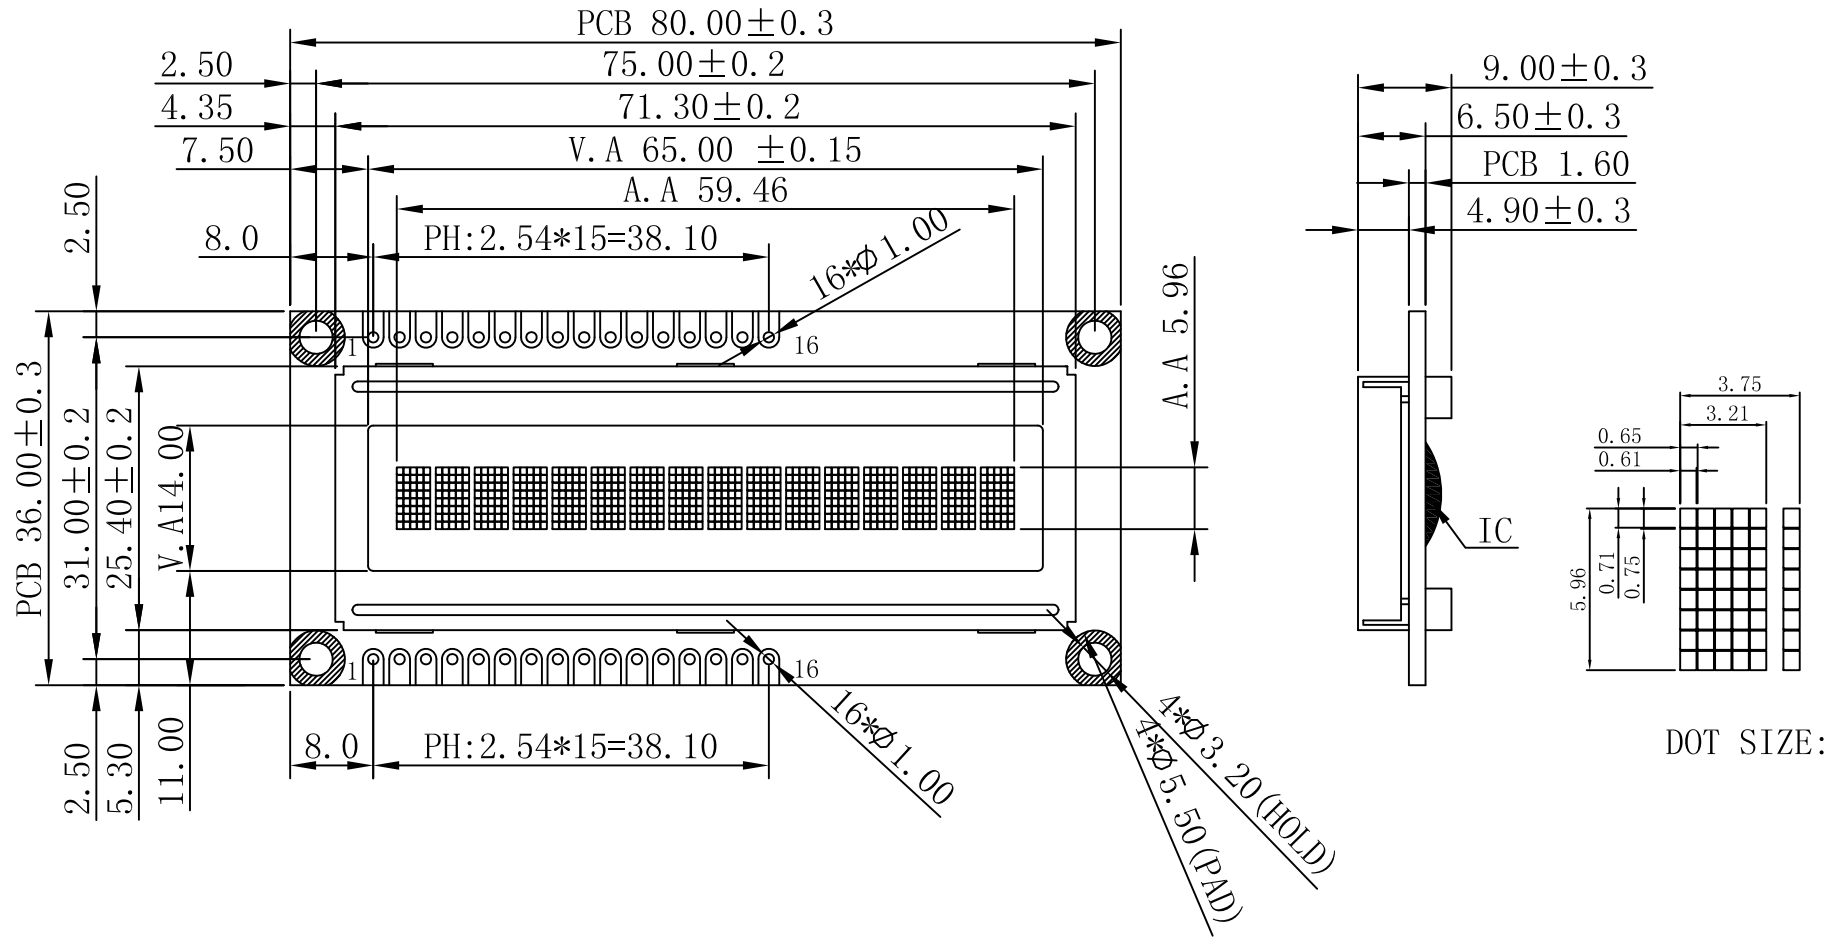

DOT SIZE:

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	N.C
16	N.C

NOTES:

- |                            |                                   |
|----------------------------|-----------------------------------|
| 01. DISPLAY TYPE:          | STN(Y-G)/POSITIVE/REFLECTIVE RoHS |
| 02. OPERATING VOLTAGE:     | VDD=5.0V,VOP=4.5V                 |
| 03. OPERATING TEMPERATURE: | -10°C~+60°C                       |
| 04. STORAGE TEMPERATURE:   | -20°C~+70°C                       |
| 05. DRIVE MODE:            | 1/16DUTY,1/5BIAS                  |
| 06. VIEWING DIRECTION:     | 6:00                              |
| 07. DRIVE IC:              | AIP31066 or Eqv                   |
| 08. CONNECTOR:             | Zebea                             |
| 09. BACKLIGHT:             |                                   |
| 10. CUSTOMER'S PART ID:    |                                   |

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-16	BCB1601-04-SERIES	VERSION: 1.0
CHECKED BY: BDT-07		PAGE 1 OF 1
APPROVED BY: BDT-03		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2013-07-02