
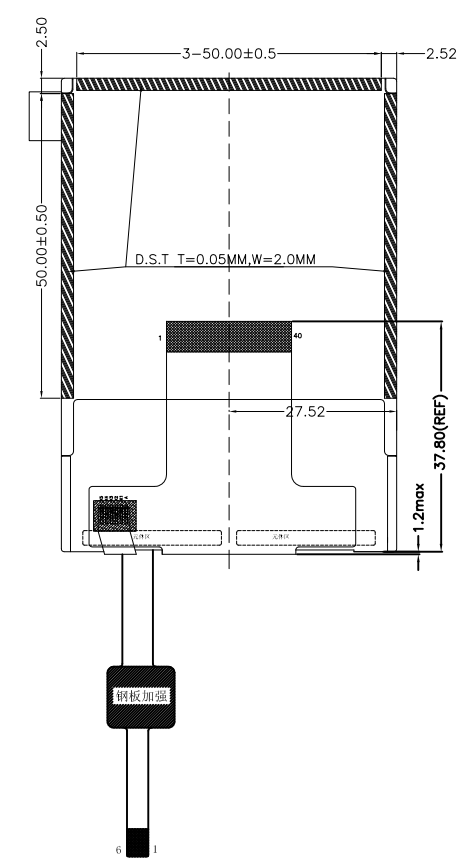
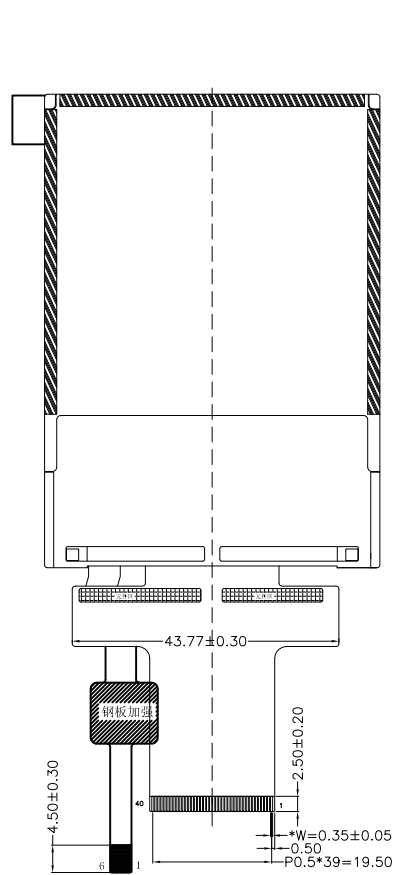


Revised Record

1.0	New Issue
2.0	Change the voltage of Backlight

2015-05-28								
2016-09-02								

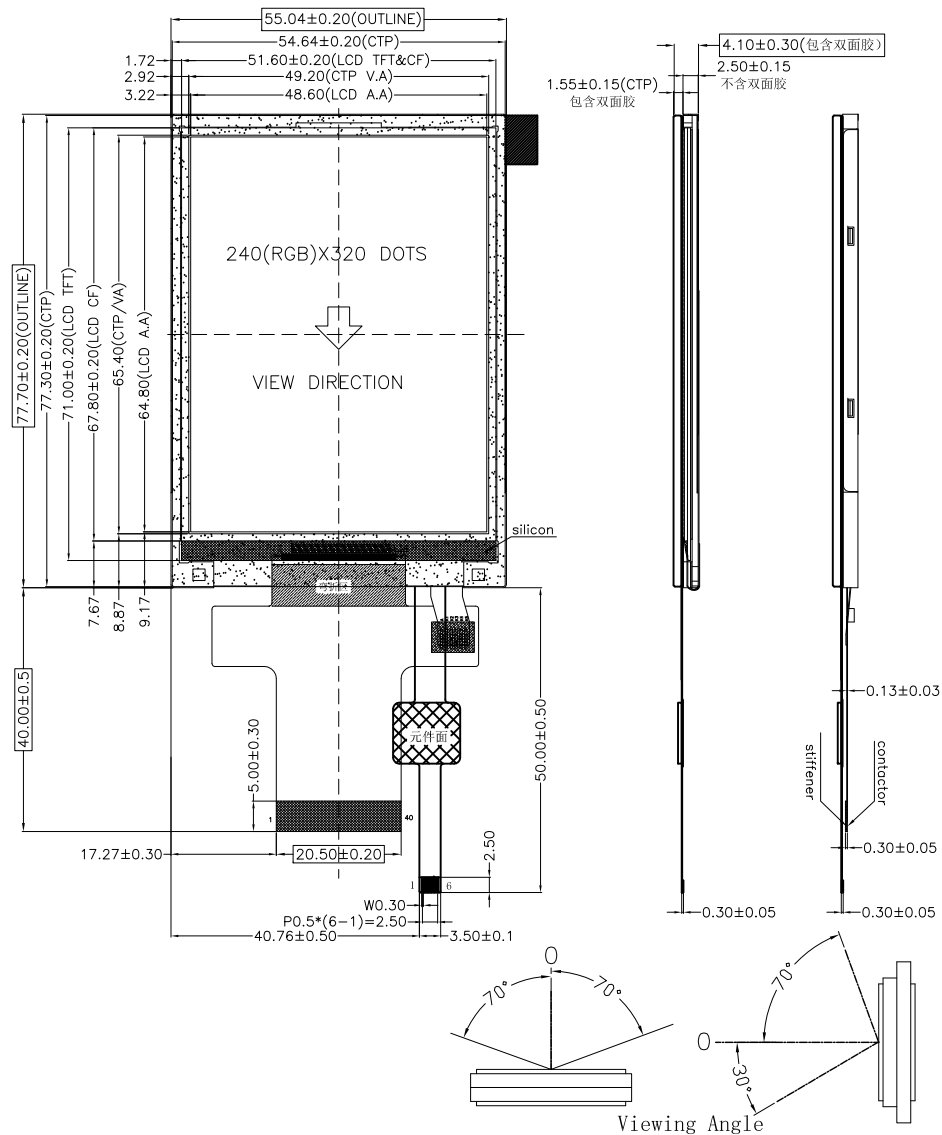


NO.	SYMBOL
1	GND
2	GND
3	IOVCC
4	VCI
5	TE
6	DB17
7	DB16
8	DB15
9	DB14
10	DB13
11	DB12
12	DB11
13	DB10
14	DB09
15	DB08
16	DB07
17	DB06
18	DB05
19	DB04
20	DB03
21	DB02
22	DB01
23	DB00
24	RD
25	WR
26	RS
27	CS
28	REST
29	IM1
30	GND
31	GND
32	VCI
33	LED-A
34	LED-K1
35	LED-K2
36	LED-K3
37	LED-K4
38	LED-K5
39	GND
40	GND

IM1	
0	16BIT (DB00-DB15)
1	18BIT (DB00-DB17)

CTP Driver ic: FT6336
结构类型: G+F

PIN	Name
1	RESET
2	INT
3	VDD
4	SCL
5	SDA
6	GND



BLAZE Blaze Display Technology Co., Ltd.

DISPLAY TYPE:	3.2" TFT	DISPLAY DRIVER:	ILI9341V (TFT IC) FT6336 (CTP IC)	PIXEL PITCH:	0.2025 X 0.2025 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M ²):	
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X5), 并联
Dot matrix:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE:	ROHS REQUEST

DESIGNED BY:	BDT-23	BDT-T3240-01-SERIES	VERSION:	2.0
CHECKED BY:	BDT-09		PAGE	1 OF 1
APPROVED BY:	BDT-05		UNIT:	mm
Website: http://www.blazedisplay.com			DATE:	2016-09-02