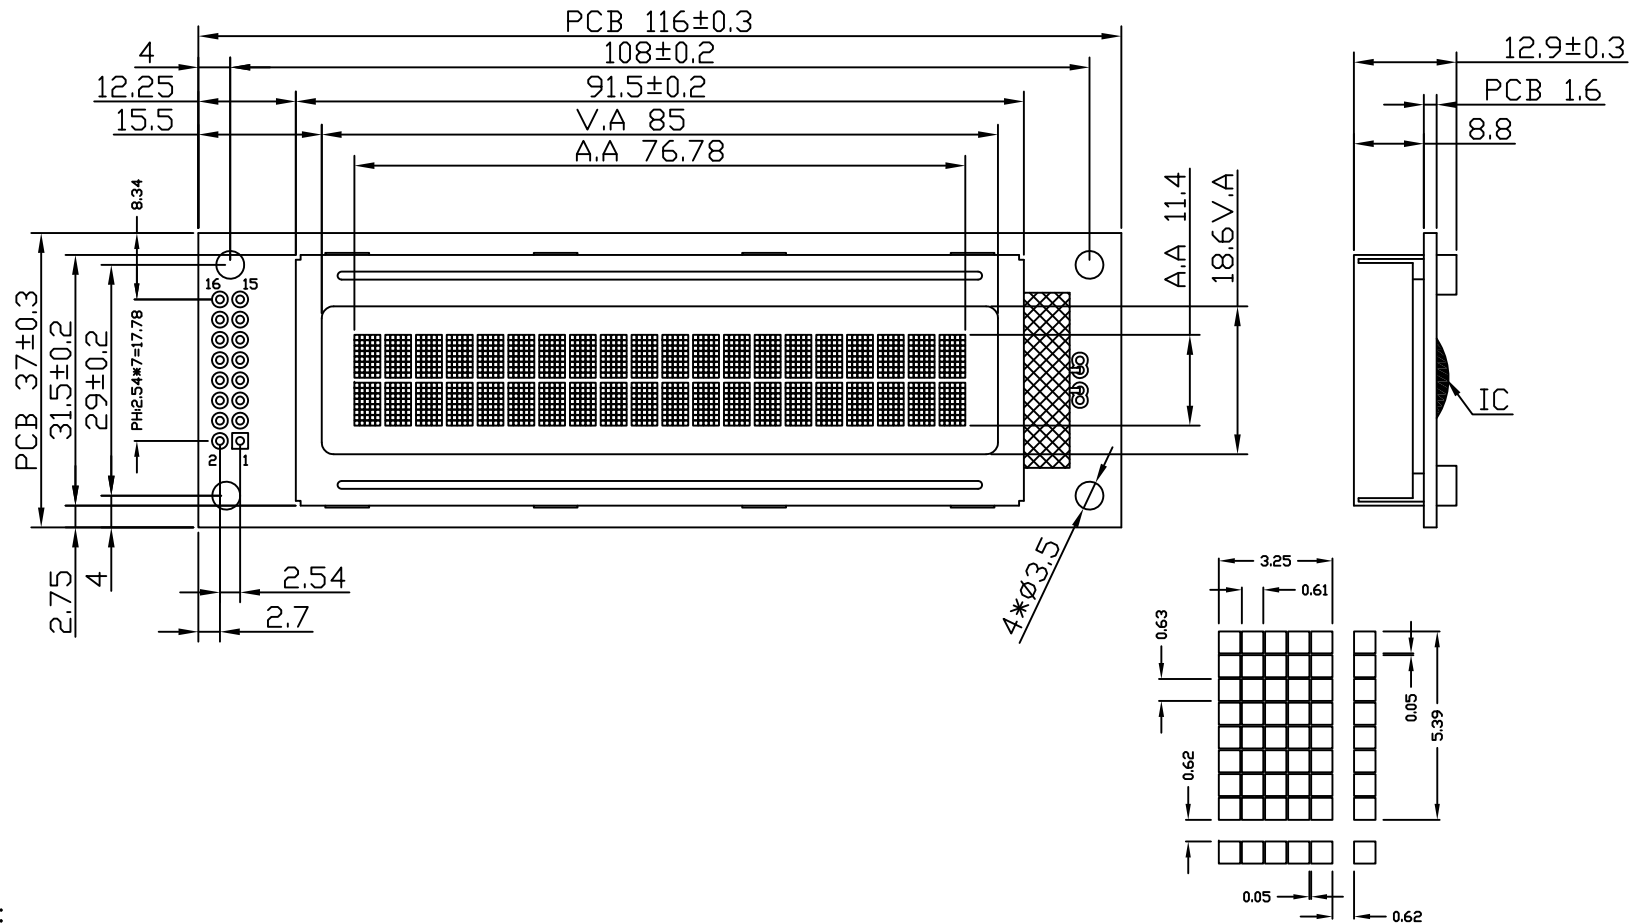


Revised Record	1.0	New issue	2012-09-11						

INTERFACE:			
	CN2	CN1	
1	VCC	1	VSS
2	D-	2	VCC
3	D+	3	V0
4	ID	4	RS
5	GND	5	R/W
		6	E
		7	DB0
		8	DB1
		9	DB2
		10	DB3
		11	DB4
		12	DB5
		13	DB6
		14	DB7
		15	LED_A
		16	LED_K





NOTES:

- |                            |                                     |
|----------------------------|-------------------------------------|
| 01. DISPLAY TYPE:          | STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS |
| 02. OPERATING VOLTAGE:     | VOP=4.7V,VDD=5.0V                   |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C                         |
| 04. STORAGE TEMPERATURE:   | -30°C~+80°C                         |
| 05. DRIVE MODE:            | 1/16DUTY,1/5BIAS                    |
| 06. VIEWING DIRECTION:     | 6:00                                |
| 07. DRIVE IC:              | ST7066U(OR-EQV)                     |
| 08. CONNECTOR:             | ZEBER                               |
| 09. BACKLIGHT:             | LED(WHITE)                          |
| 10. CUSTOMER'S PART ID:    | BLAZE_STANDARD_PRODUCT              |

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-14	BCB2002-02B-SERIES	VERSION: 1.0
CHECKED BY: BDT-08	 	PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2012-09-11