

Revised Record

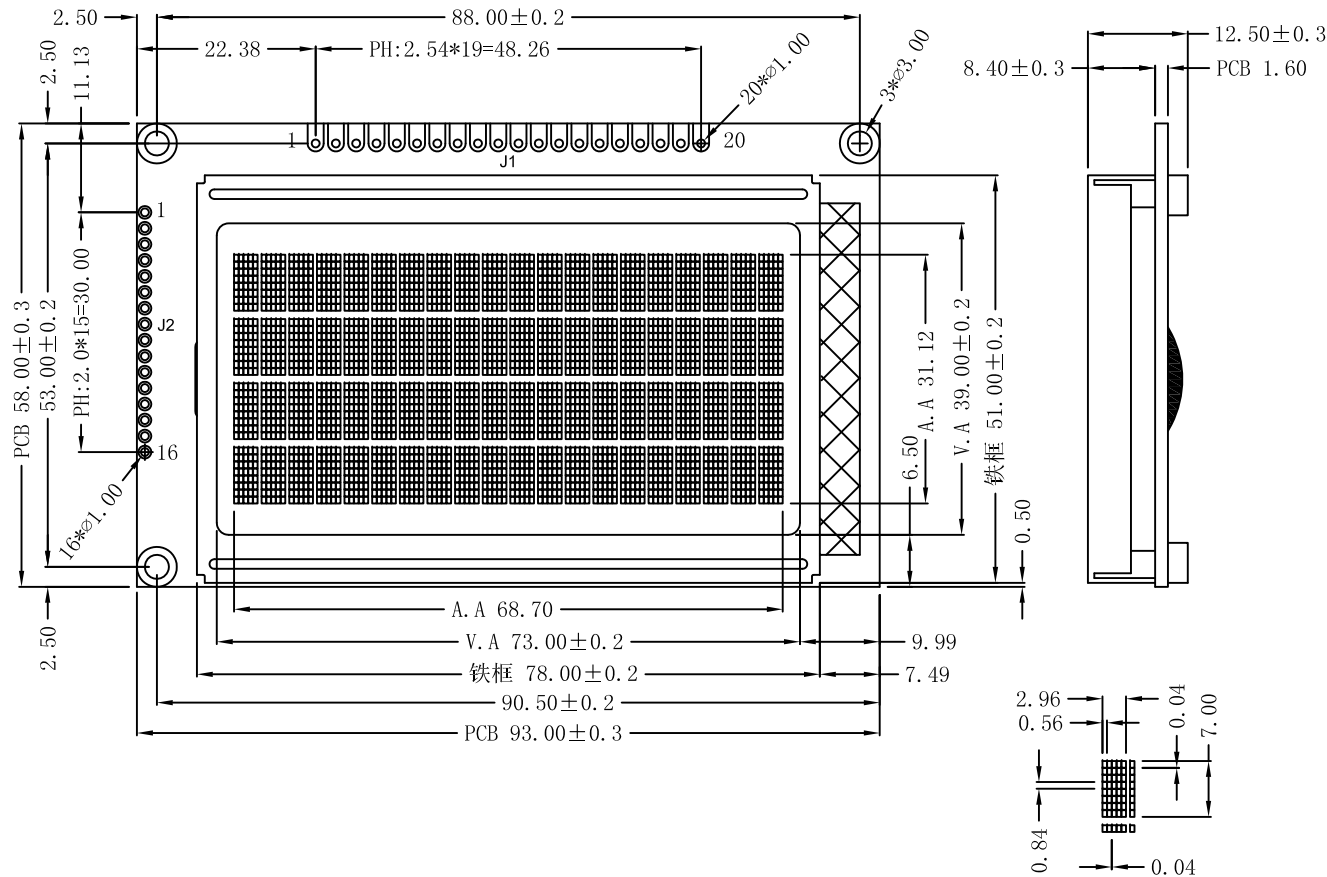
1.0

New issue

2012-10-25

INTERFACE

J1		J2	
1	GND	1	DB7
2	VDD	2	DB6
3	V0	3	DB5
4	RS	4	DB4
5	RW	5	DB3
6	E	6	DB2
7	DB0	7	DB1
8	DB1	8	DB0
9	DB2	9	E
10	DB3	10	RW
11	DB4	11	RS
12	DB5	12	V0
13	DB6	13	VDD
14	DB7	14	GND
15	LED-A	15	LED-K
16	LED-K	16	LED-A
17	N.C		
18	N.C		
19	LED-A		
20	LED-K		





Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

NOTES:

- 01. DISPLAY TYPE: STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=4.5V,VDD=5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/16DUTY,1/5BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: ST7066U(OR-EQV)
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED(WHITE,I=80MA)
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-27	BCB2004-02 SERIES	VERSION: 1.0
CHECKED BY: BDT-06	 	PAGE 1 OF 1
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2012-10-25