

Revised Record


1.0

New Issue

2015-12-02

INTERFACE:

1	VSS
2	VDD
3	VO
4	A0
5	CS1
6	CS2
7	NC
8	NC
9	R/W
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	/RES
19	A
20	K

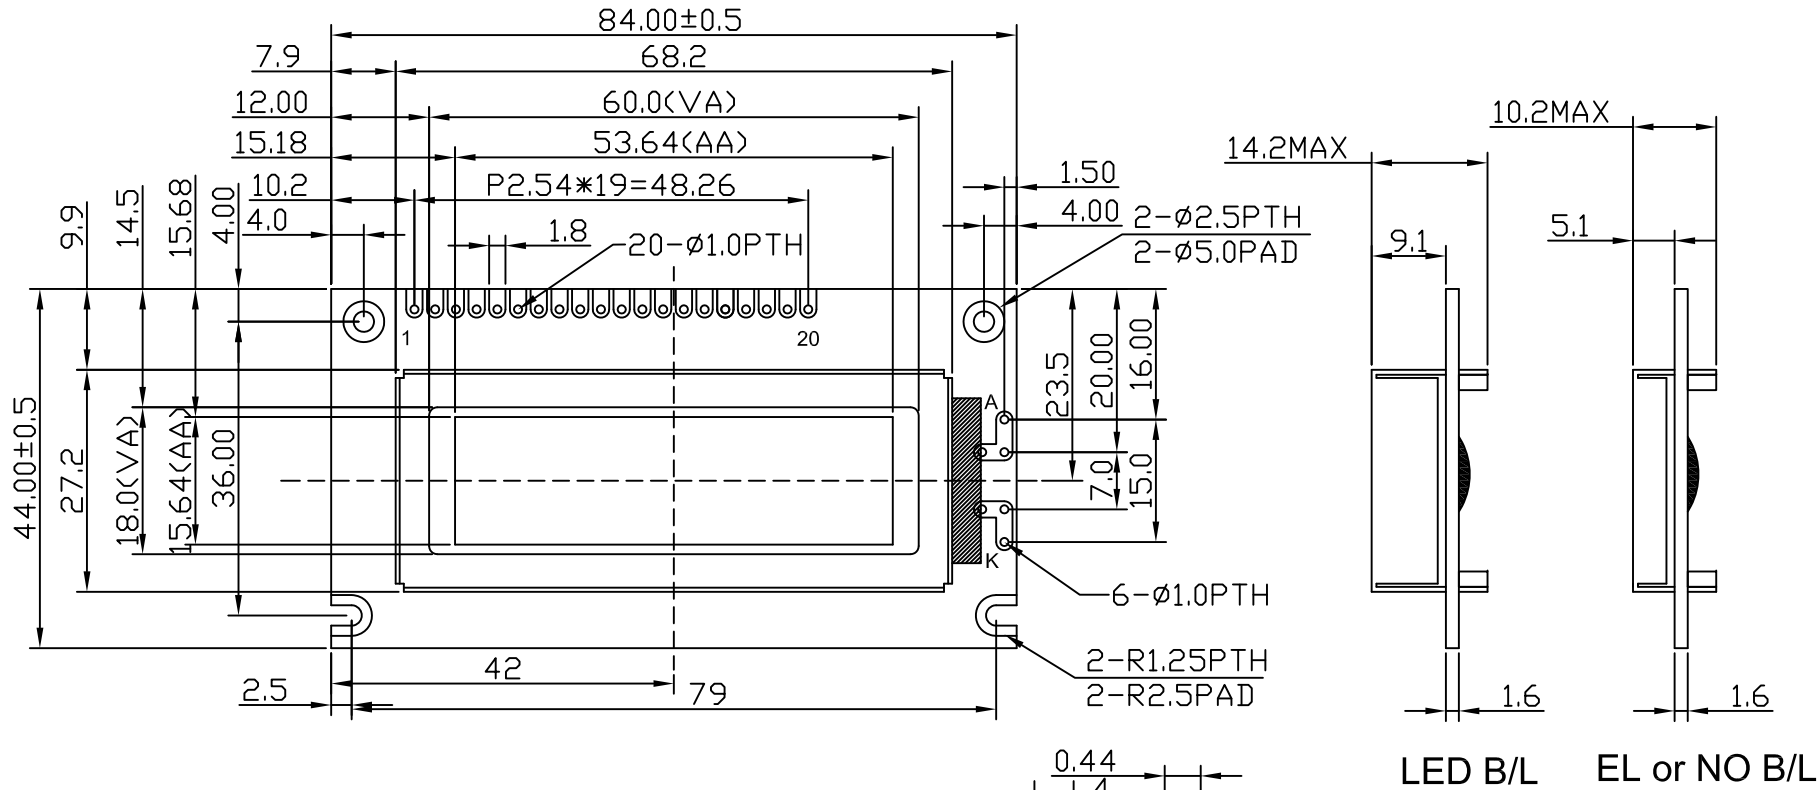

↑
VIEWING DIRECTION

DOT SIZE:
SCALE: 10:1

NOTES:

- 01. DISPLAY TYPE: STN/NEGATIVE/TRANSMISSIVE/BLUE RoHS
- 02. OPERATING VOLTAGE: VOP=4.5V,VDD=5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/32DUTY,1/5BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: SED1520/SBN1661G(OREQU)
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED(WHITE)
- 10. Dimensions with mark "*" is important, with mark "()" are referenced


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-29

BGB12232-13-SERIES

VERSION: 1.0

CHECKED BY: BDT-07



PAGE 1 OF 1

APPROVED BY: BDT-01

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2015-12-02