

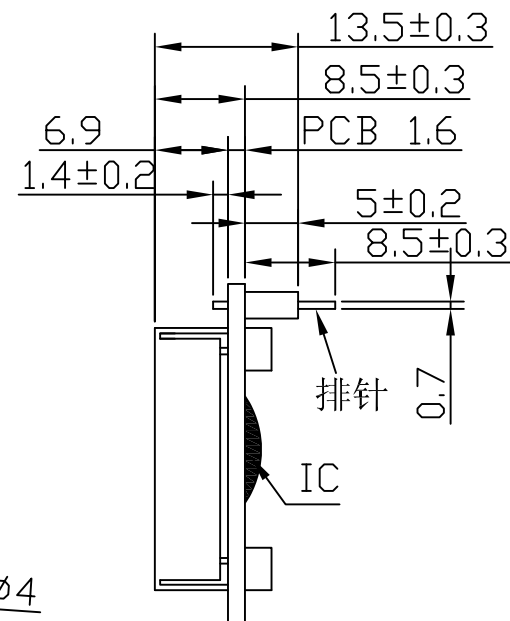


Revised Record

1.0 New issue

2013-05-21

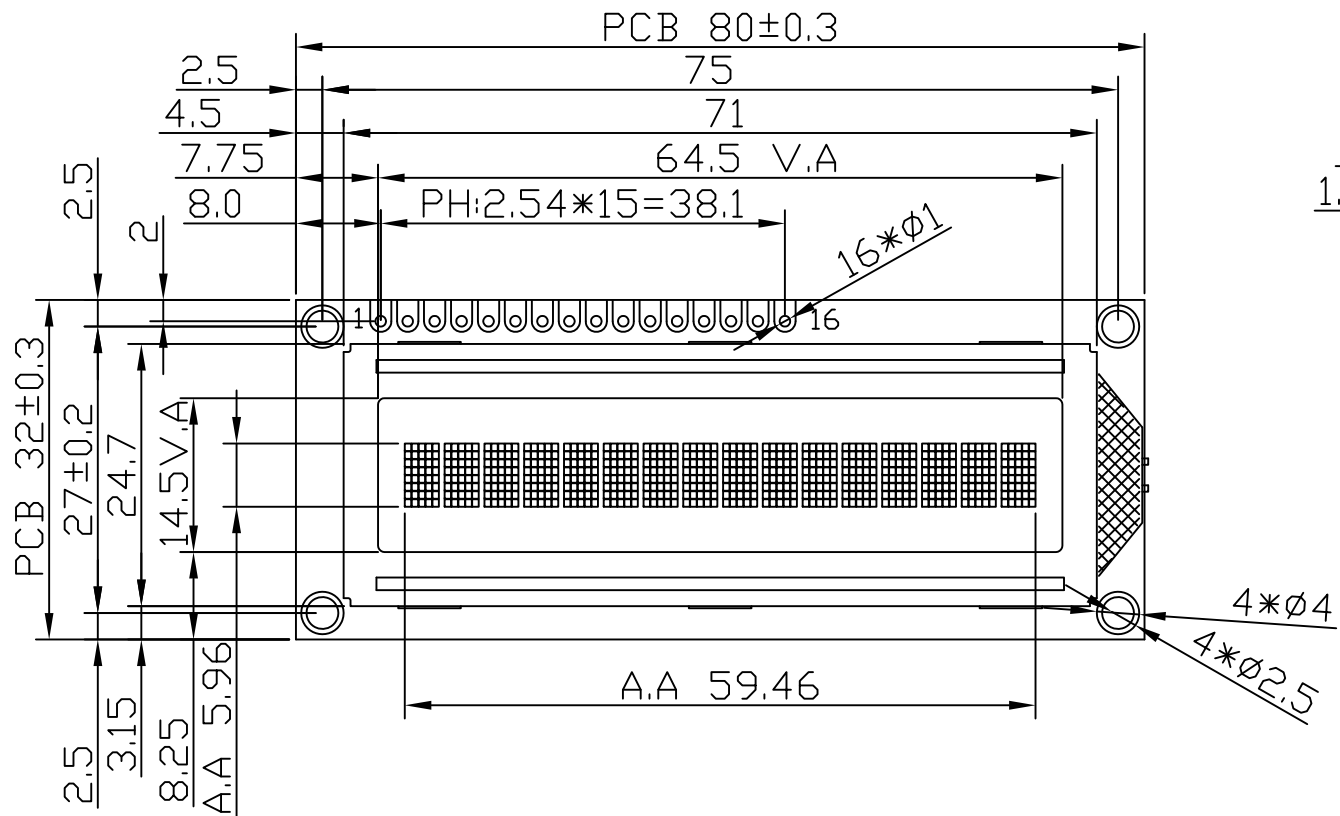

DOT SIZE:

INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

NOTES:

- DISPLAY TYPE: STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS
- OPERATING VOLTAGE: VOP=4.5V,VDD=5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/16DUTY,1/5BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: ST7066U(OR-EQV)
- CONNECTOR: ZEBER
- BACKLIGHT: LED(WHITE)
- CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-22	BCB1601-02-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-04		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2013-05-21