


Revised Record	1.0	New Issue	2017-08-09						

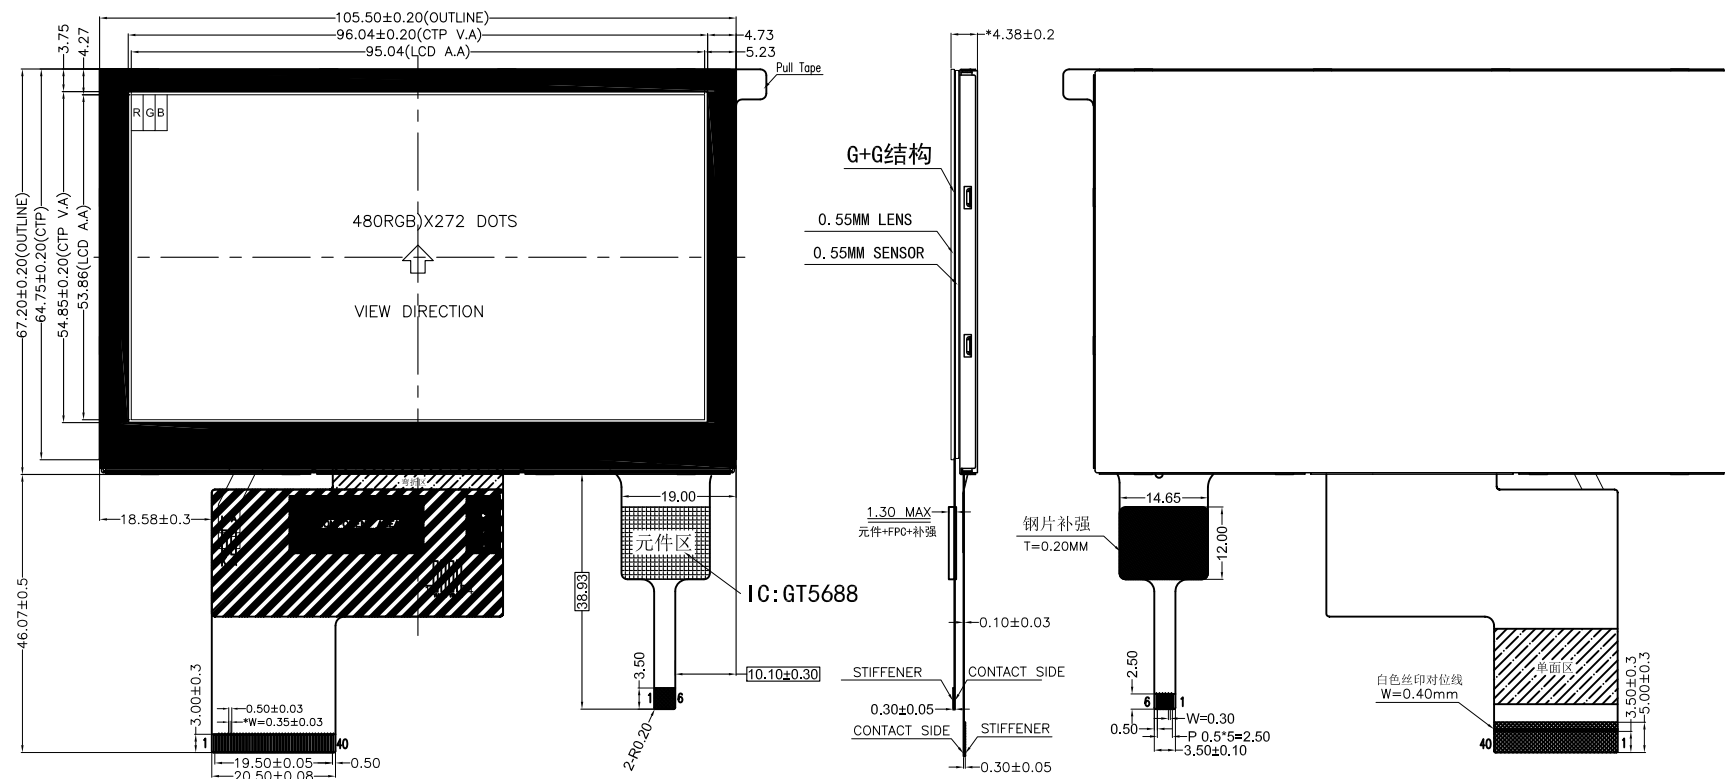


#### FPC INTERFACE

1	K
2	A
3	GND
4	DVDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

#### 电容屏接口定义 (CTP INTERFACE)



PIN NO.	DEFINITION
1	RESET
2	VDD/VCC
3	GND
4	INT
5	SCL
6	SDA

#### 背光电路:



DISPLAY TYPE:	4.3" TFT	DISPLAY DRIVER:	ST7257-G4-1C	PIXEL PITCH:	0.198 X 0.198 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M <sup>2</sup> ):	
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X7), 串联
Dot matrix:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

**BLAZE** Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-23	BDT-T4340-04A-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2017-08-09