




Revised Record

1.0 New Issue

2015-10-08

FPC INTERFACE

1	K
2	A
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	DGND
30	DC1K
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

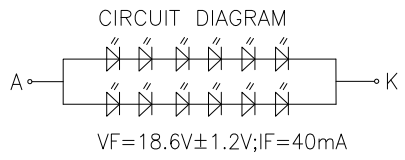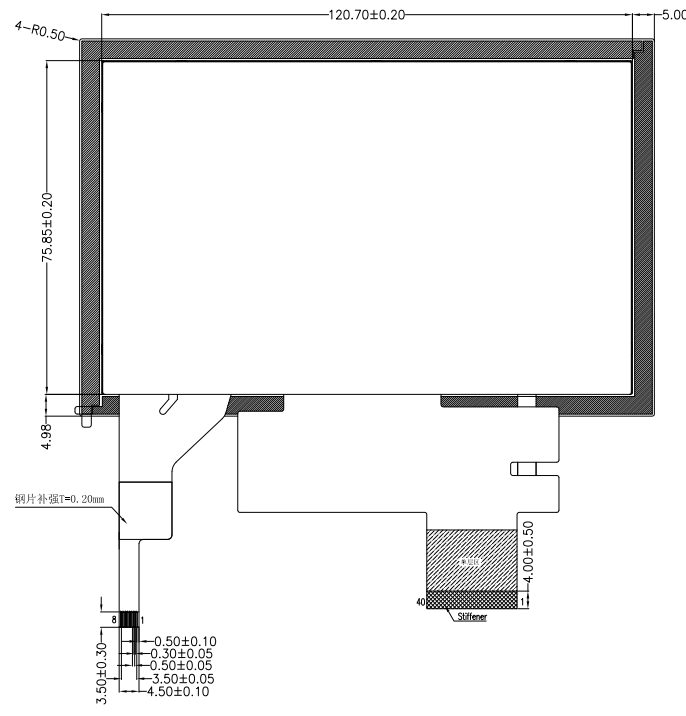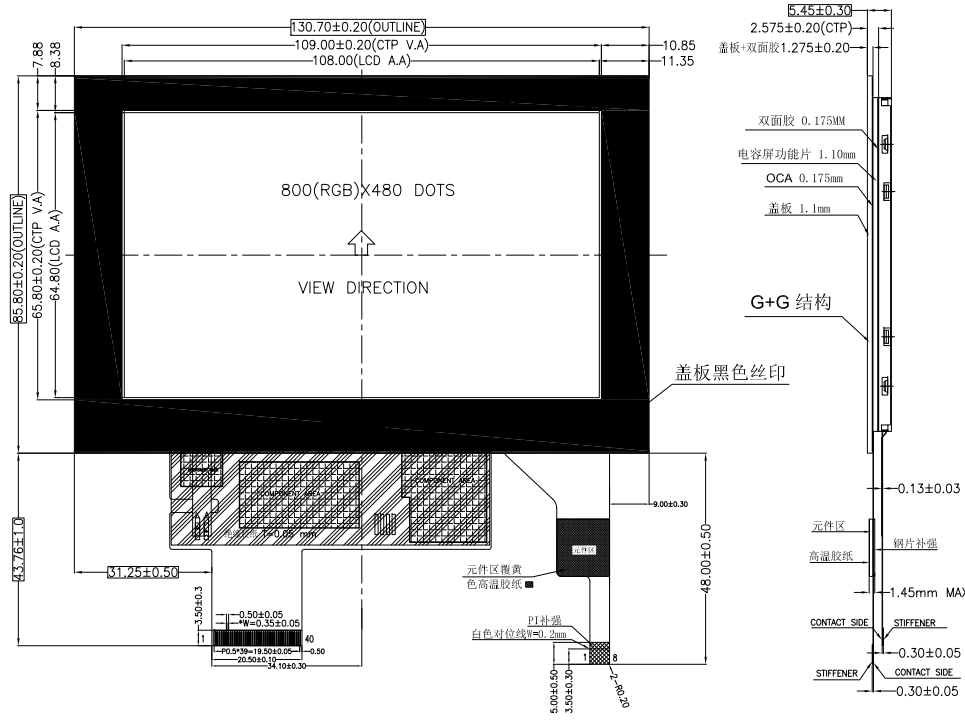

CTP interface defined

PIN	SYMBOL
1	VDD
2	RST
3	INT
4	NC
5	NC
6	SCL
7	SDA
8	GND

**BLAZE** Blaze Display Technology Co., Ltd.

DISPLAY TYPE:	5.0" TFT	DISPLAY DRIVER:		PIXEL PITCH:	0.135 X 0.135 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M <sup>2</sup> ):	130(MIN) / 160(TYP)
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X12),6串*2并
Dot matrix:	800(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE:	ROHS REQUEST

DESIGNED BY:	BDT-23	BDT-T5040-04-SERIES (CTP)	VERSION:	1.0
CHECKED BY:	BDT-09		PAGE	1 OF 1
APPROVED BY:	BDT-05		UNIT:	mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>			DATE:	2015-10-08