

Revised Record

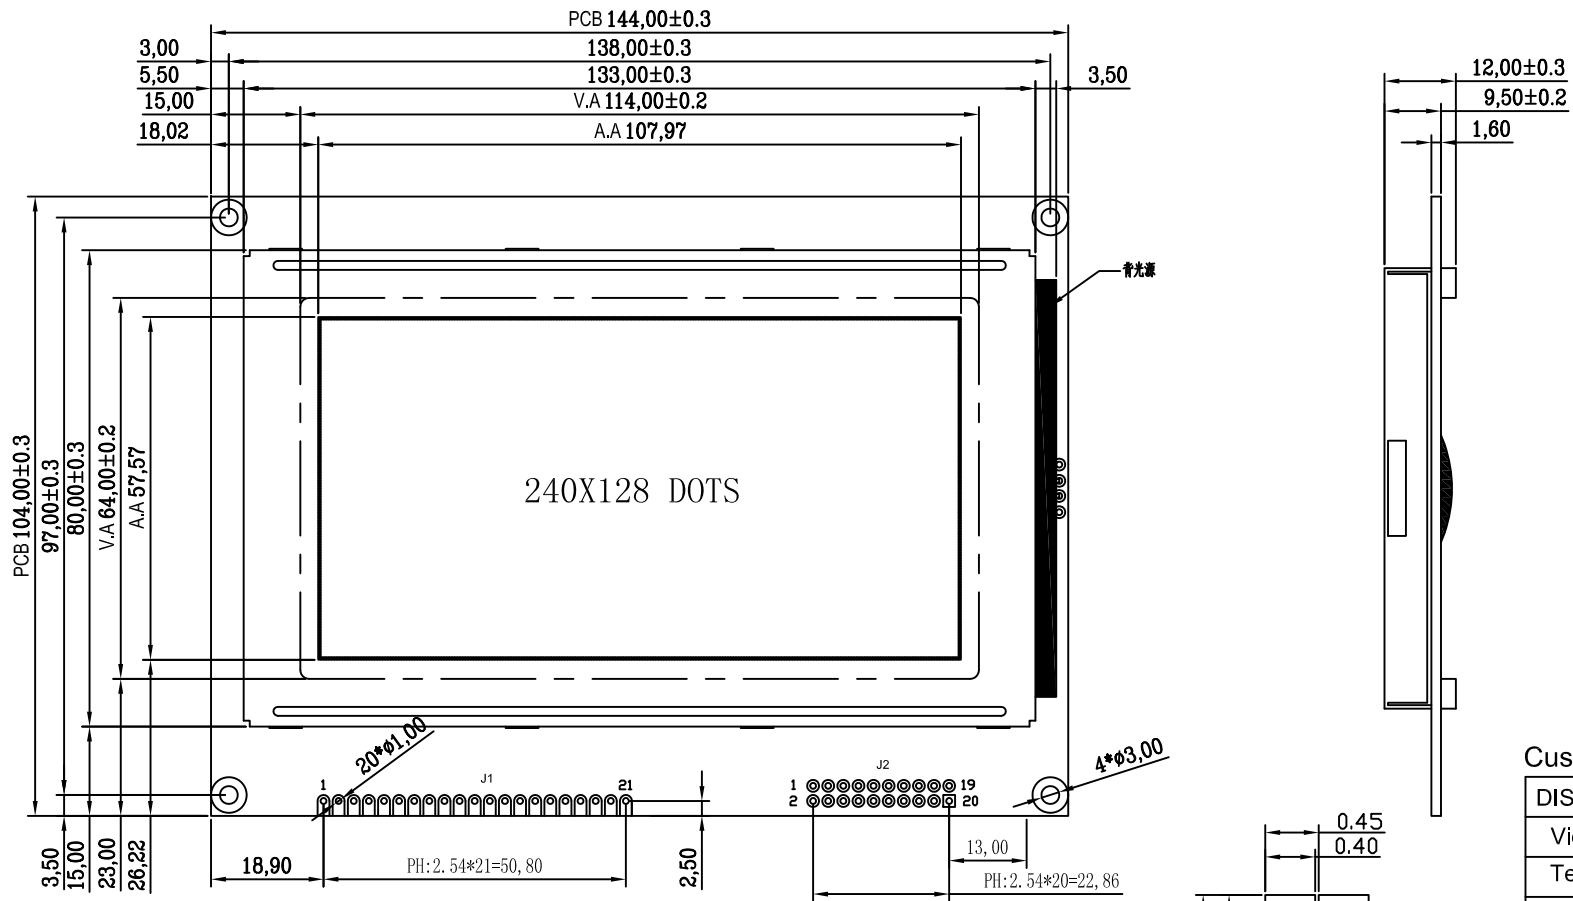
1.0

New issue

2011-09-24

INTERFACE:

J1		J2	
1	FG	1	FG
2	VSS	2	VSS
3	VCC(5V)	3	VCC(5V)
4	V0	4	V0
5	WR	5	WR
6	RD	6	RD
7	CS	7	CS
8	C/D	8	C/D
9	RST	9	RST
10	DB0	10	DB0
11	DB1	11	DB1
12	DB2	12	DB2
13	DB3	13	DB3
14	DB4	14	DB4
15	DB5	15	DB5
16	DB6	16	DB6
17	DB7	17	DB7
18	FS	18	FS
19	VEE	19	LED+(5V)
20	LED+(5V)	20	LED-
21	LED-		





Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- | | |
|----------------------------|-------------------------------------|
| 01. DISPLAY TYPE: | STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=18.0V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/128DUTY,1/12BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | RA6963(OR-EQV) |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(WHITE) |
| 10. CUSTOMER'S PART ID: | |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-27	BGB240128-03A	VERSION: 1.0
CHECKED BY: BDT-04	 	PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2011-09-24