

Revised Record


1.0

New issue

2017-02-10

INTERFACE

J2	J3
1	D0
2	D1
3	D2
4	D3
5	DISP
6	FLM
7	M
8	LP
9	CP
10	VDD
11	VSS
12	VOUT
13	V0
14	FG
15	LEDA
16	LEDK

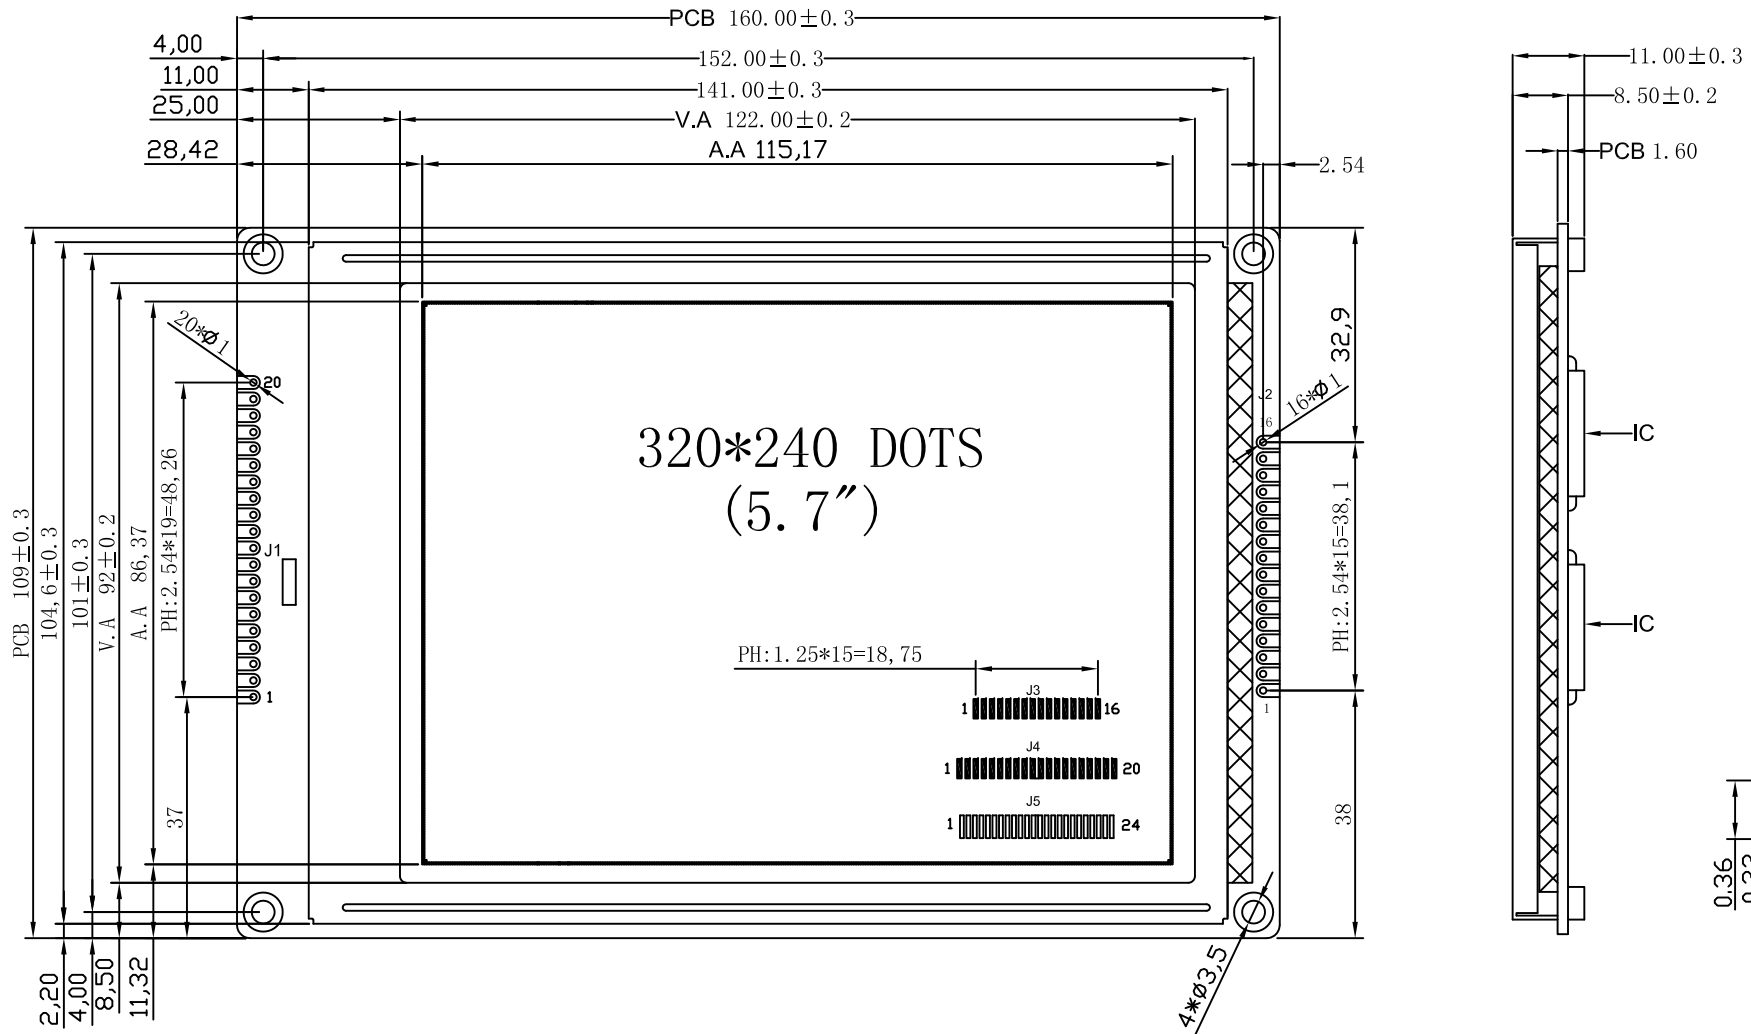

NOTES:

- | | |
|----------------------------|--|
| 01. DISPLAY TYPE: | FSTN-(B/W)/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=23V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/240DUTY,1/17BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | NT7086*7(OR-EQV) |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(WHITE,I=300MA) |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT |


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24

BCB320240-06B-SERIES

VERSION: 1.0

CHECKED BY: BDT-06



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2017-02-10