

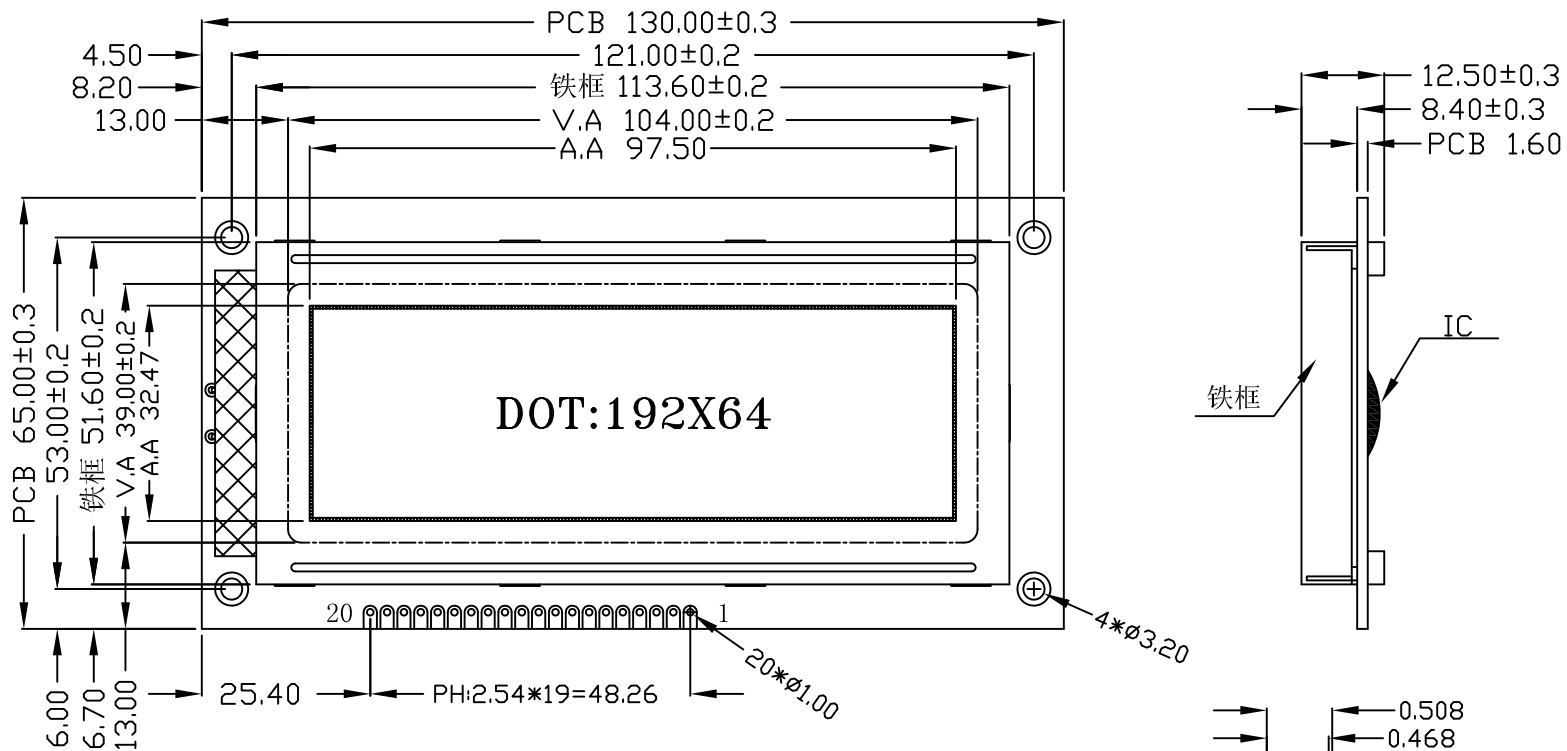
Revised Record

1.0 New issue

2012-07-19

INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	RST
17	CS2
18	CS3
19	VOUT
20	LED-A(5V)





NOTES:

- | | |
|----------------------------|-------------------------------------|
| 01. DISPLAY TYPE: | STN,Y-G/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=10.5V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/64DUTY,1/9BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | AIP31108/AIP31107(OR-EQV) |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(YELLOW-GREEN) |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT |

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24	BGB19264-04-SERIES	VERSION: 1.0
CHECKED BY: BDT-06	 	PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2012-07-19