


Revised Record

1.0 New Issue

2013-07-05

INTERFACE

1	DB4
2	DB5
3	DB6
4	DB7
5	RS
6	RW
7	E
8	N.C
9	DB0
10	DB1
11	DB2
12	DB3
13	N.C
14	VSS
15	V0
16	VDD

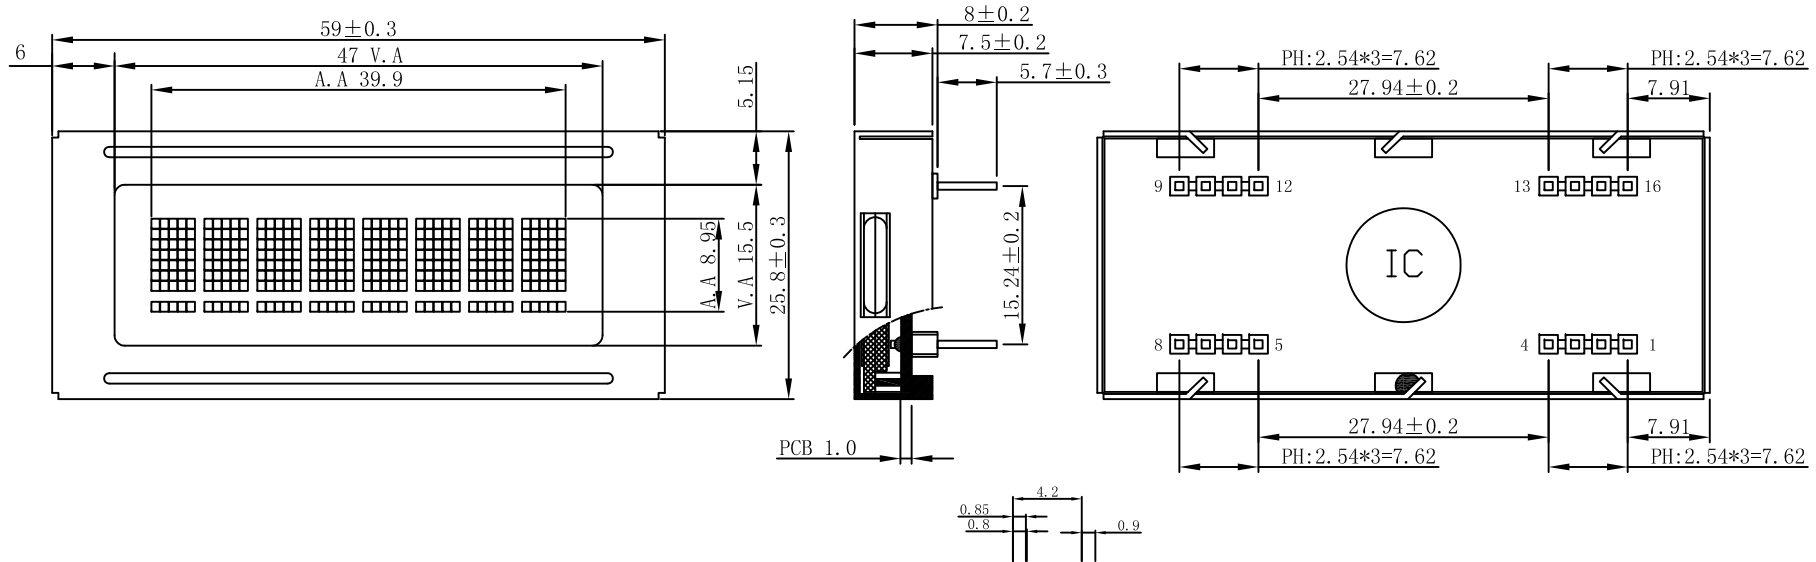


Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

NOTES:

- | | |
|----------------------------|-----------------------------------|
| 01. DISPLAY TYPE: | STN-GREY/POSITIVE/REFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=4.5V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/8DUTY,1/4BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | ST7066U(OR-EQV) |
| 08. CONNECTOR: | ZEBRA |
| 09. BACKLIGHT: | NONE |
| 10. CUSTOMER'S PART ID: | |



DOT SIZE:

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-20	BCB0801-05-SERIES	VERSION: 1.0
CHECKED BY: BDT-07		PAGE 1 OF 1
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2013-07-05