

Revised Record




1.0

New issue

2014-06-24

INTERFACE

1	AO
2	N.C
3	/CS
4	/RD
5	R/W
6	VDD(3.3V)
7	VSS
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	/RST
17	N.C
18	N.C
19	LED-A(3.3V)
20	LED-K(0V)

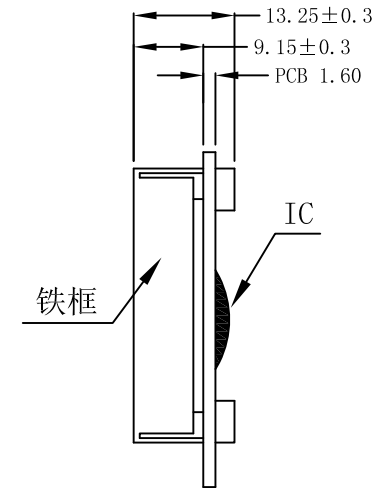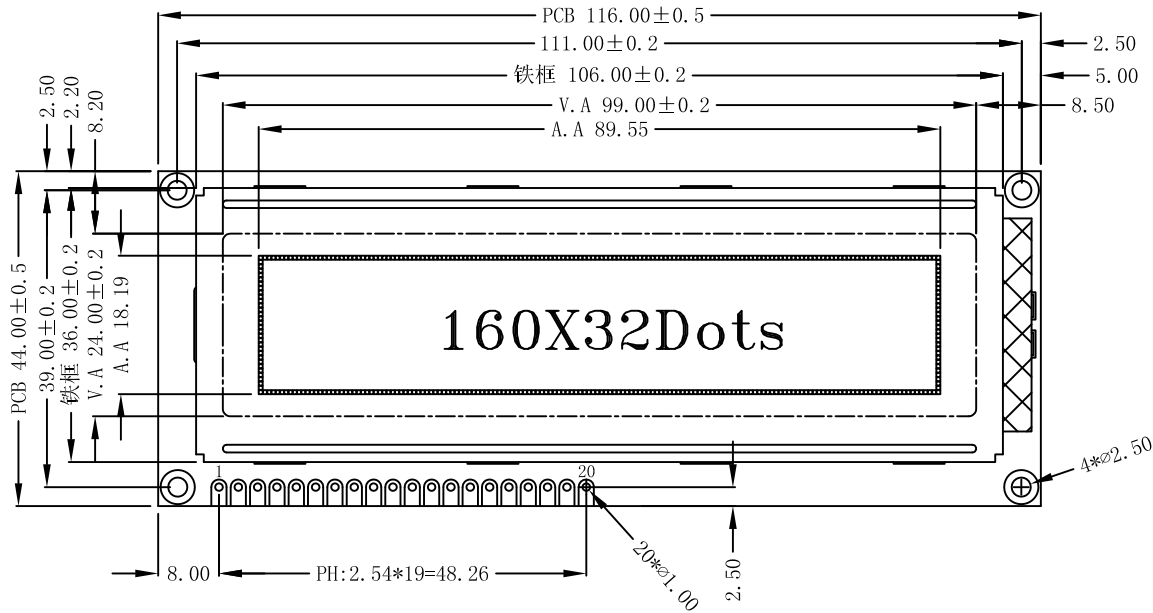

DOT SIZE:



Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- 01. DISPLAY TYPE: STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=4.5V,VDD=3.3V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/32DUTY,1/6BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: AIP31020+AIP31021(OR-EQV)
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: WHITE,V=3.3V,I<35MA
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24	BGB16032-03A-SERIES	VERSION: 1.0
CHECKED BY: BDT-06	 	PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-06-24