
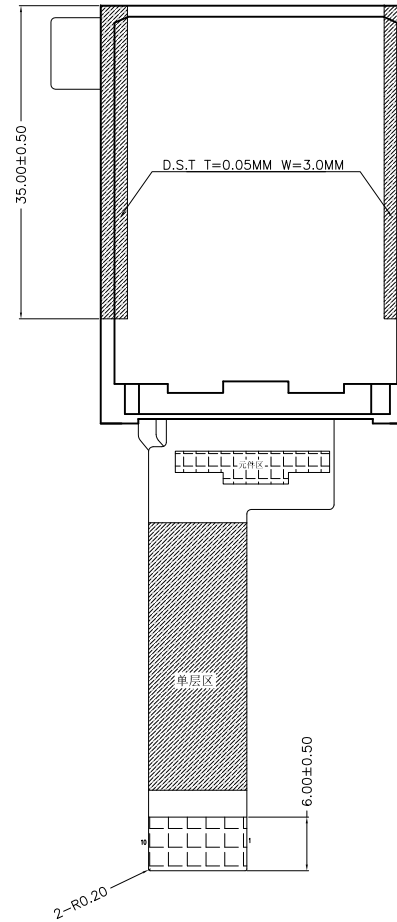
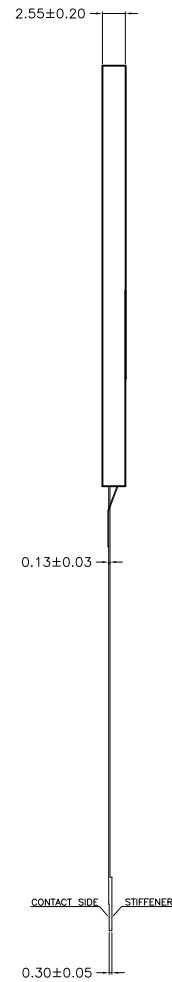



Revised Record

1.0 New Issue

2015-01-19

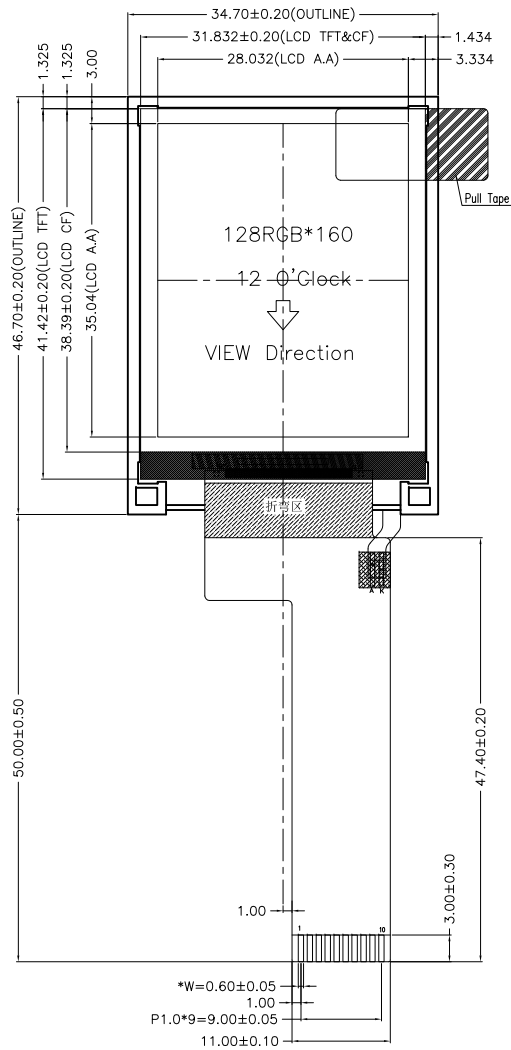

NO.	Signal
1	/DC
2	VDD
3	GND
4	VDD
5	CS
6	SDA
7	SCK
8	RESET
9	BL_A
10	BL_K



DISPLAY TYPE:	1.77" TFT	DISPLAY DRIVER:	ST7735S	PIXEL PITCH:	0.219 X 0.219 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X2), 并联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	128(RGB)X160 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST


**BLAZE** Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-23

BDT-T17710-01-SERIES

VERSION: 1.0

CHECKED BY: BDT-09



PAGE 1 OF 1

APPROVED BY: BDT-05

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2015-01-19