


Revised Record




1.0 New Issue

2016-02-26

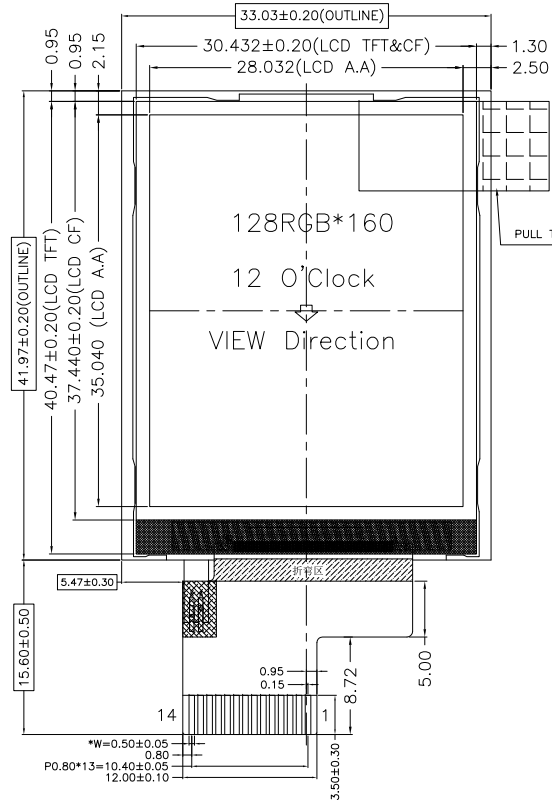


2.60±0.15  
不含双面胶

PULL TAPE

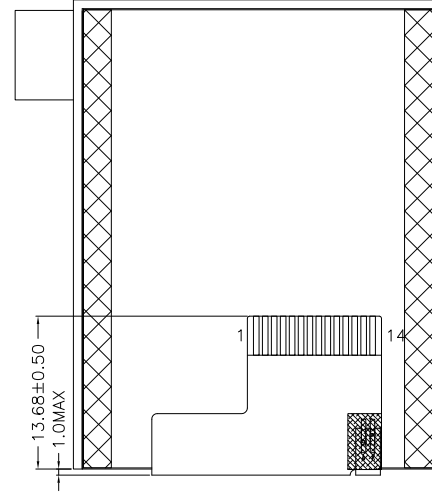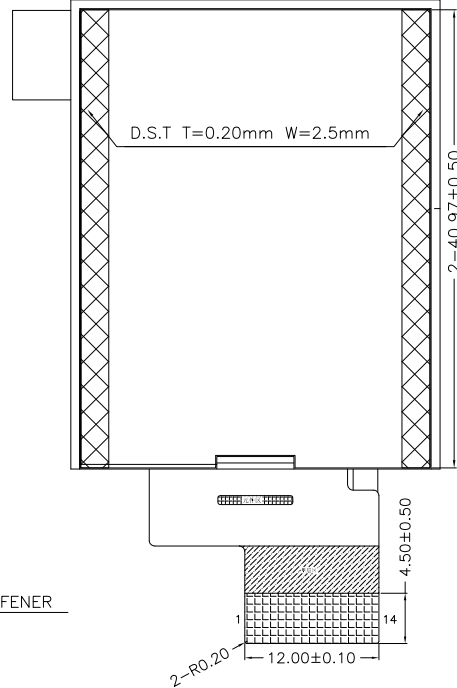

FPC折弯后示图

NO.	Signal
1	LED_A
2	LED_K
3	GND
4	CSB
5	RESET
6	A0
7	SCL
8	SDA
9	VDD
10	VSS
11	IOVCC
12	NC
13	NC
14	GND



Backlight circuit  
If=40mA; Vf=3.1V±0.2V

**BLAZE** Blaze Display Technology Co.,Ltd.

DISPLAY TYPE:	1.77" TFT	DISPLAY DRIVER:	ST7735S	PIXEL PITCH:	0.219 X 0.219 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M <sup>2</sup> ):	200(MIN) / 230(TYP)
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X2), 并联
Dot matrix:	128(RGB)X160 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

DESIGNED BY: BDT-23	BDT-T17714-01-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2016-02-26