
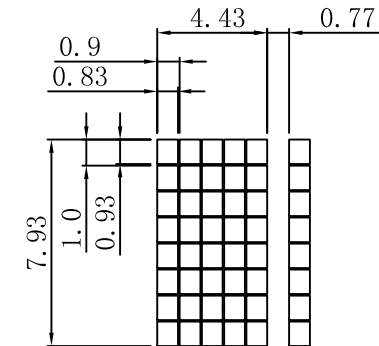
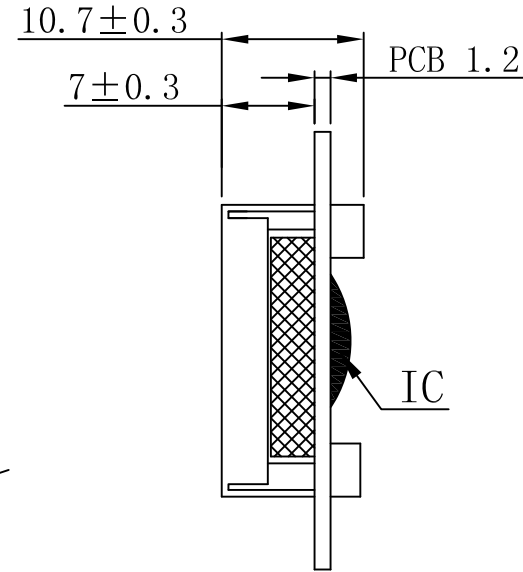


Revised Record

1.0 New issue

2013-3-23

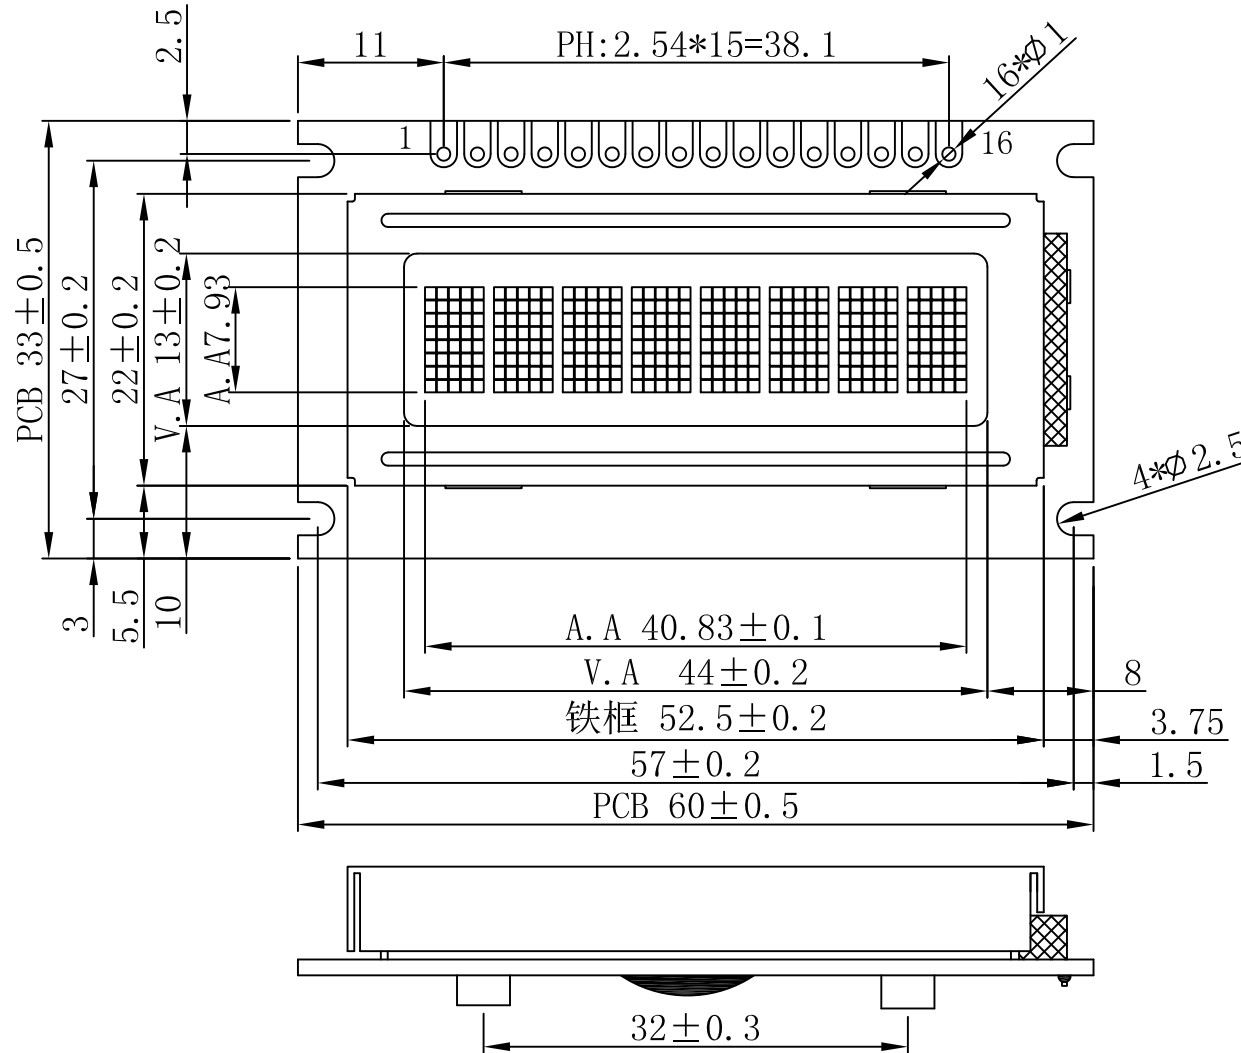

DOT SIZE:

INTERFACE:

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDK
16	LEDA(21V)

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

NOTES:

- | | |
|----------------------------|------------------------------------|
| 01. DISPLAY TYPE: | STN-YG/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=4.5V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -30°C~+80°C |
| 04. STORAGE TEMPERATURE: | -30°C~+85°C |
| 05. DRIVE MODE: | 1/8DUTY,1/4BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | ST7066U(OR-EQV) |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(YELLOW-GREEN) |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT |


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24

BCB0801-C01

VERSION: 1.0

CHECKED BY: BDT-06



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2013-3-23