






Revised Record

1.0 New Issue

2014-01-02

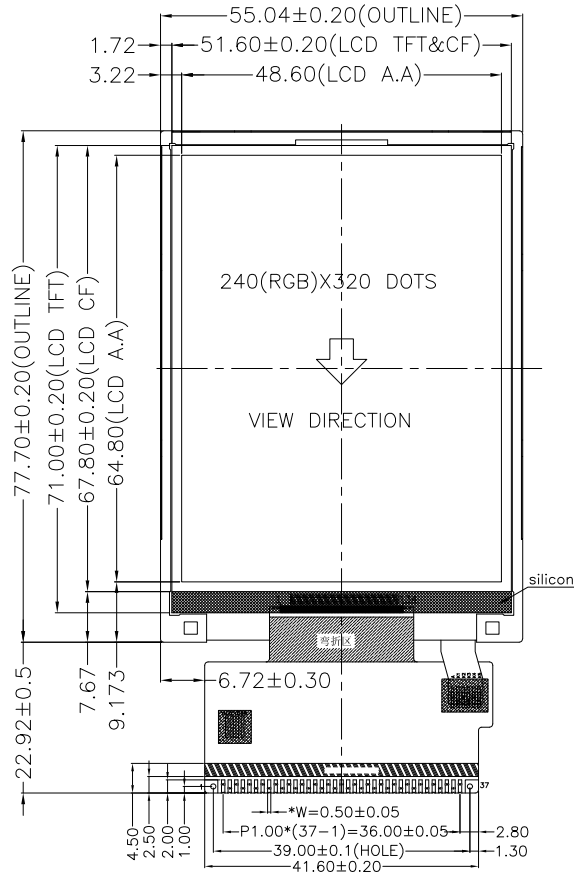

2.50±0.15  
(Excluding double-sided adhesive)

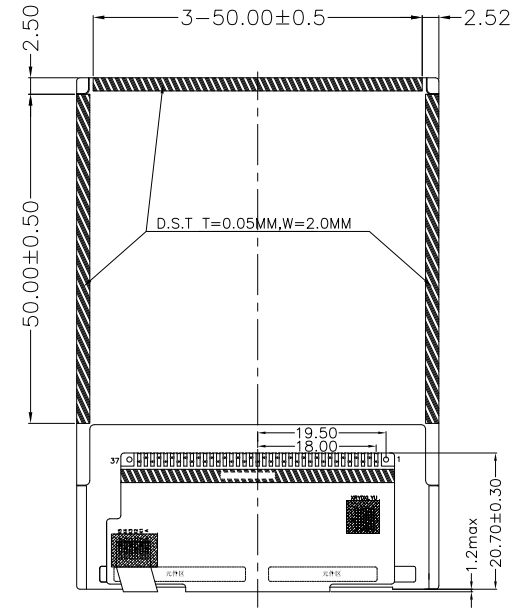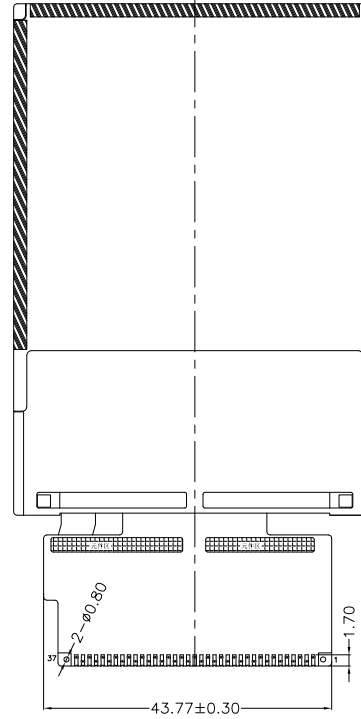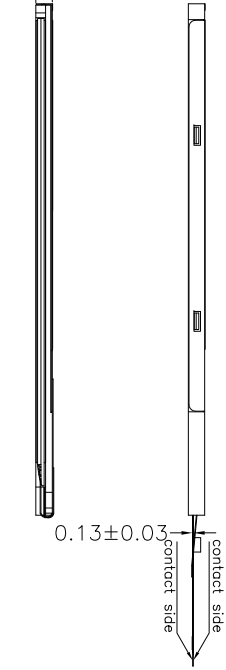

NO.	SYMBOL
1	GND/TE
2	VCC
3	IOVCC
4	CS
5	RS
6	WR
7	RD
8	REST
9	DB00
10	DB01
11	DB02
12	DB03
13	DB04
14	DB05
15	DB06
16	DB07
17	DB08
18	DB09
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	GND
26	YD(NC)
27	XL(NC)
28	YU(NC)
29	XR(NC)
30	LED-K1
31	LED-K2
32	LED-K3
33	LED-K4
34	LED-K5
35	LED-6(NC)
36	LED-A
37	GND

DISPLAY TYPE:	3.2" TFT	DISPLAY DRIVER:	ILI9341V	PIXEL PITCH:	0.2025 X 0.2025 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X5), 并联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

**BLAZE** Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-23      BDT-T3237-01-SERIES      VERSION: 1.0

CHECKED BY: BDT-09            PAGE 1 OF 1

APPROVED BY: BDT-05      UNIT: mm

Website: <http://www.blazedisplay.com>      DATE: 2014-01-02