


Revised Record	1.0	New Issue	2015-10-08						
----------------	-----	-----------	------------	--	--	--	--	--	--

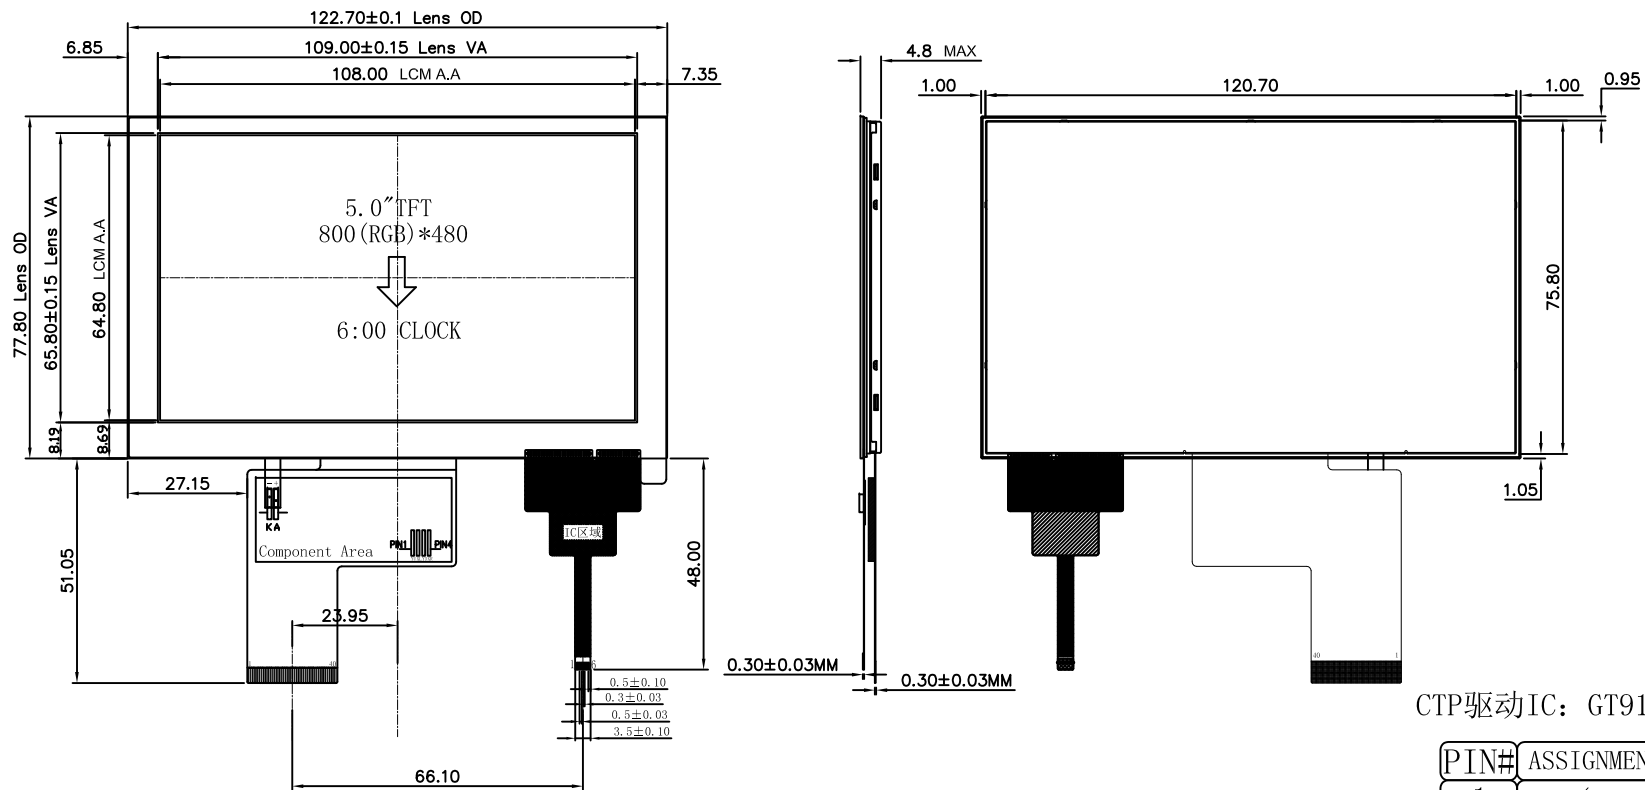

No	PIN NAME
1	LED-
2	LED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	DGND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

CTP驱动IC: GT9157

PIN#	ASSIGNMENT
1	VDD (2.8V)
2	SCL
3	SDA
4	RESET
5	INT
6	GND

Circuit Diagram:



NOTES:

- 01. DISPLAY TYPE: 5.0" TFT/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: 3.0~3.2V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. LCM BRIGHTNESS: 350cd/m<sup>2</sup>(typ); Uniformity: 80%
- 06. VIEWING DIRECTION: 12:00 □'clock
- 07. DRIVE IC: ILI6122\_C&ILI5960
- 08. CONNECTOR: FPC
- 09. BACKLIGHT: LED (12 DIES, VF=18.6V, IF=40mA/LED)
- 10. CUSTOMER'S PART ID: BLAZE STANDARD PRODUCT

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23	BDT-T5040-06-SERIES (CTP)	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2015-10-08

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作