

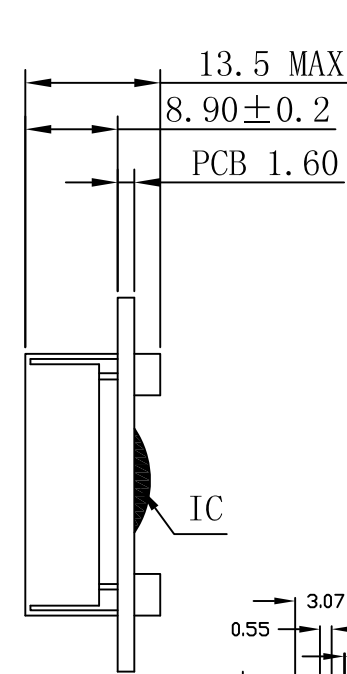


Revised Record

1.0 New Issue

2014-04-19

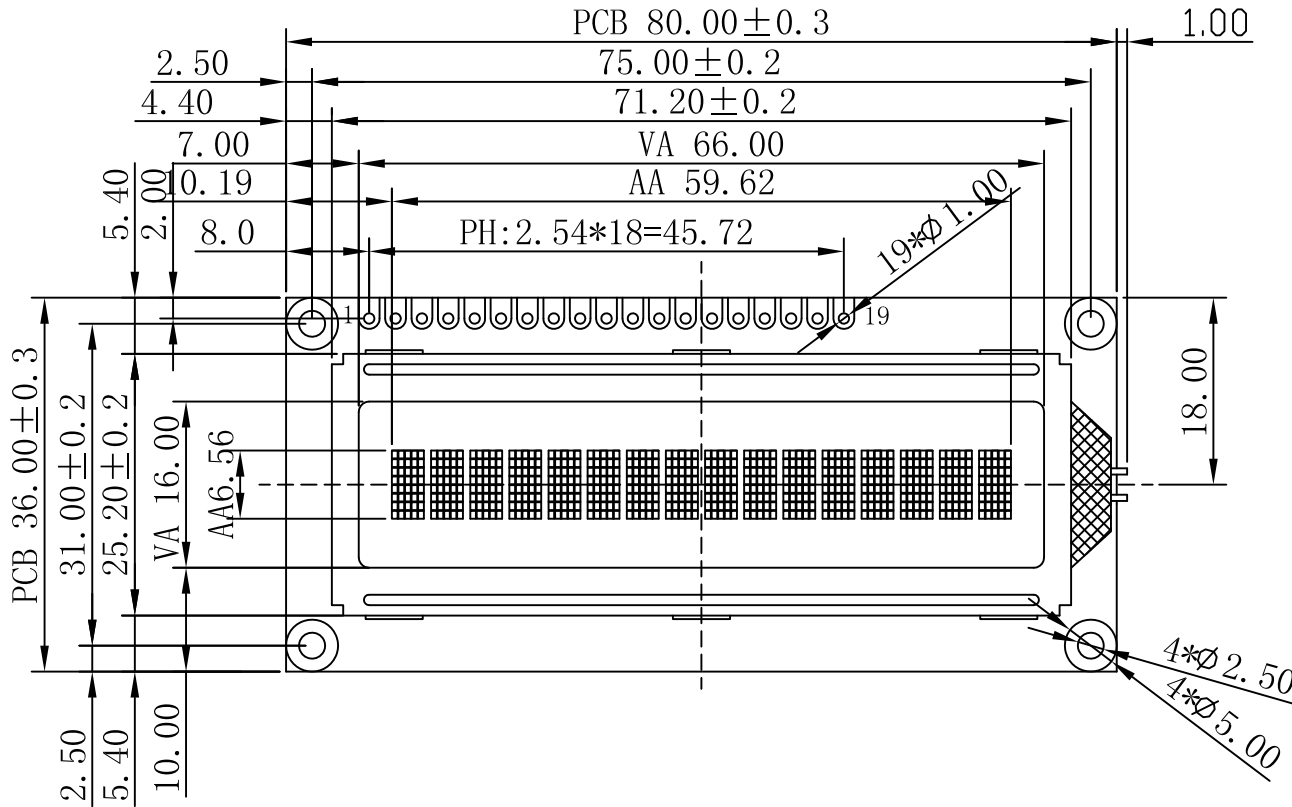

INTERFACE

1	VSS
2	VDD(3.3V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	VEE
16	LED-A(5.0V)
17	LED-K
18	VSS
19	FGND

NOTES:

- |                            |                                      |
|----------------------------|--------------------------------------|
| 01. DISPLAY TYPE:          | STN,Grey/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE:     | VDD=5.0V VOP=4.3V                    |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C                          |
| 04. STORAGE TEMPERATURE:   | -30°C~+80°C                          |
| 05. DRIVE MODE:            | 1/16DUTY,1/5BIAS                     |
| 06. VIEWING DIRECTION:     | 6:00                                 |
| 07. DRIVE IC:              | ST7066U-0A or Eqv.                   |
| 08. CONNECTOR:             | Zebea                                |
| 09. BACKLIGHT:             | LED White                            |
| 10. CUSTOMER'S PART ID:    |                                      |

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-14	BCB1601-01-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2014-04-19