

Revised Record


1.0

New issue

2011-4-21

INTERFACE

1	VDD(5V)
2	VSS
3	V0
4	RST
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LED-A(5V)
18	LED-K
19	N.C
20	N.C

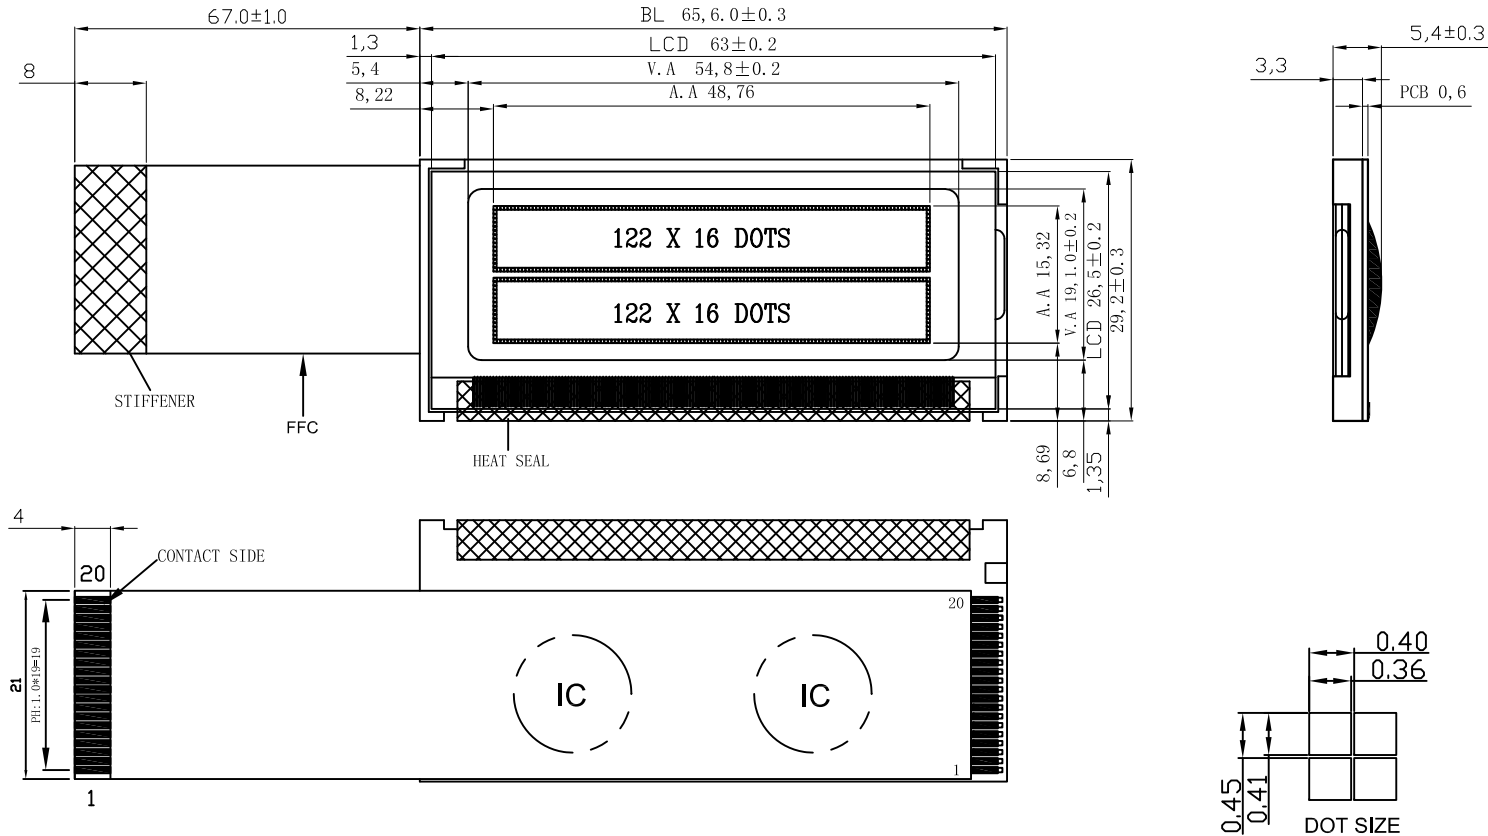

NOTES:

- 01. DISPLAY TYPE: STN,BLUE/NEGATIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=5.0V,VDD=5V
- 03. OPERATING TEMPERATURE: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 04. STORAGE TEMPERATURE: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 05. DRIVE MODE: 1/32DUTY,1/5BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: SBN1661G
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED(WHITE,I=90MA)
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23

BGB12232-C02

VERSION: 1.0

CHECKED BY: BDT-06



PAGE 1 OF 1

APPROVED BY: BDT-01

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2011-4-21