
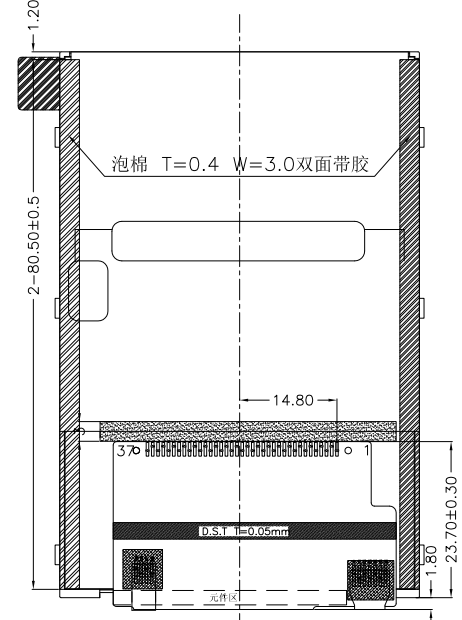
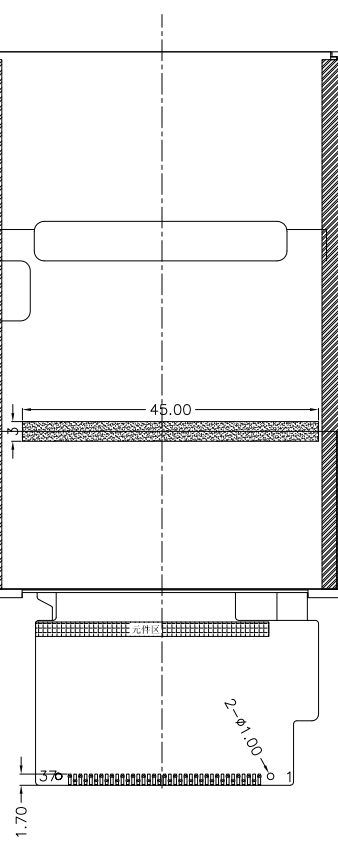



Revised Record

1.0 New Issue

2015-08-26

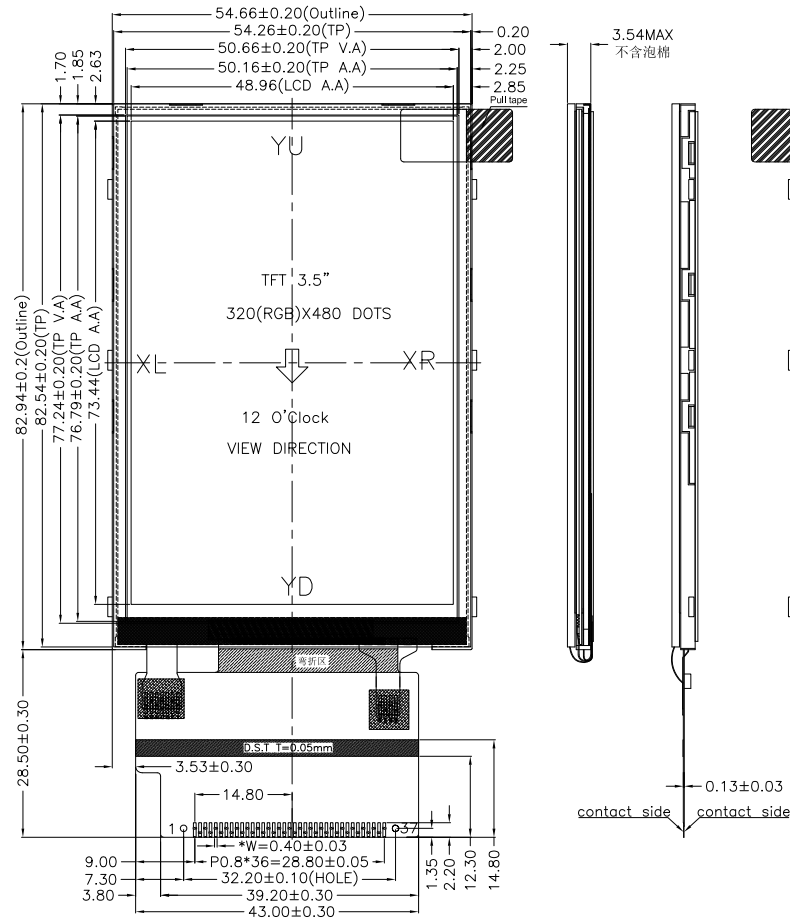

FPC折弯后示图



PIN FUNCTION

No	SYMB
1	GND
2	VDD
3	IOVCC
4	CS
5	RS
6	WR
7	RD
8	REST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	FMARK
26	YD
27	XR
28	YU
29	XL
30	LED-K1
31	LED-K2
32	LED-K3
33	LED-K4
34	LED-K5
35	LED-K6
36	LED-A
37	GND

BLAZE Blaze Display Technology Co.,Ltd.

DISPLAY TYPE:	3.5" TFT	DISPLAY DRIVER:	NT35310	PIXEL PITCH:	0.153 X 0.153 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X6), 并联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	320(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+TP	MATERIAL NOTE	ROHS REQUEST

DESIGNED BY:	BDT-23	BDT-T3537-01-SERIES	VERSION:	1.0
CHECKED BY:	BDT-09		PAGE	1 OF 1
APPROVED BY:	BDT-05		UNIT:	mm
Website: http://www.blazedisplay.com			DATE:	2015-08-26