Revised Record									
	1.0	New Issue	2014-05-15						

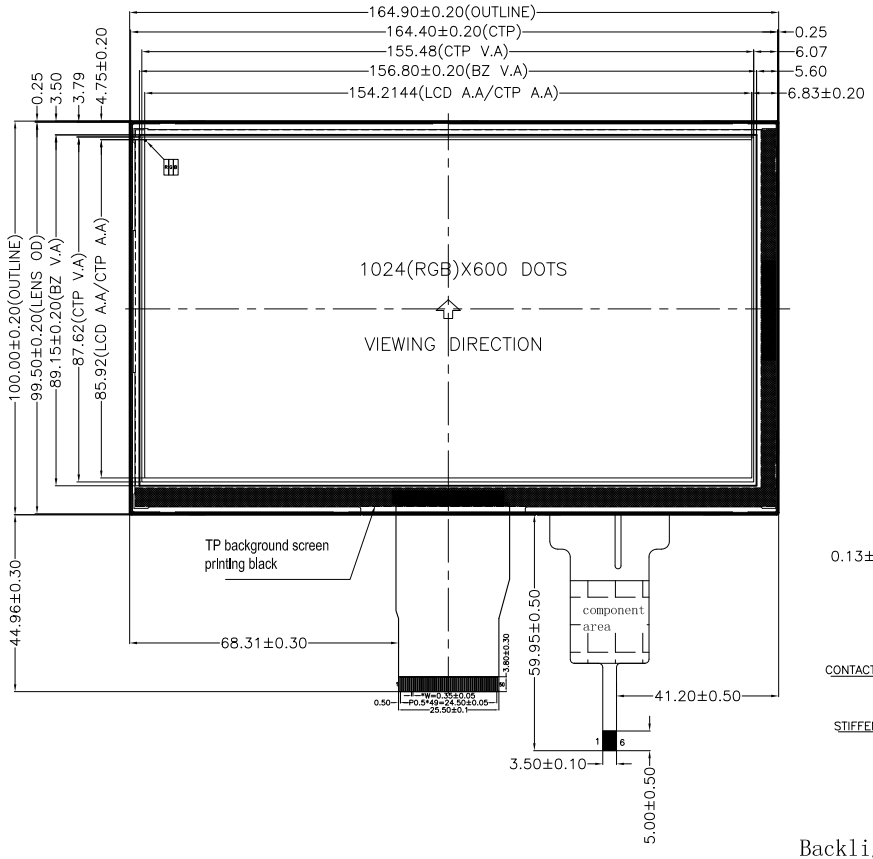

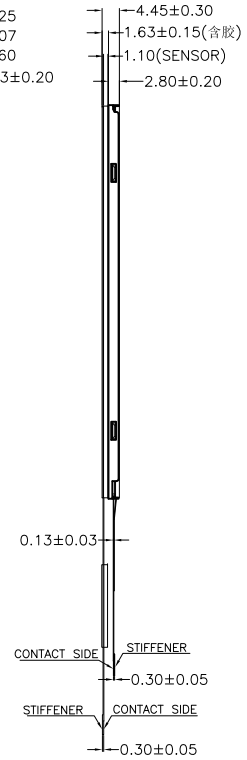

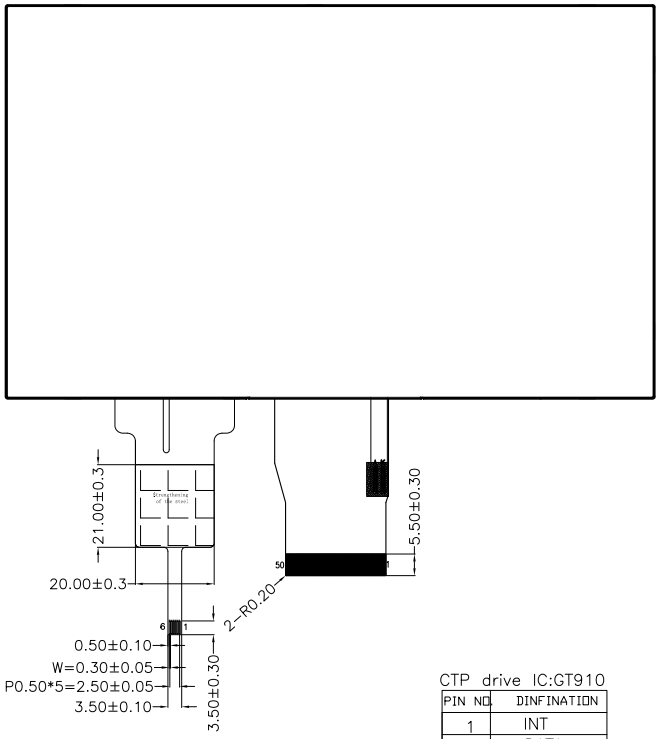

PIN	Symbol
1	Vled+(NC)
2	Vled+(NC)
3	Vled-(NC)
4	Vled-(NC)
5	GND
6	Vcom
7	DVdd
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	Avdd
44	RESET
45	NC
46	Vcom
47	DITHB
48	GND
49	NC
50	NC

CTP drive IC:GT910

PIN NO.	DINFINATION
1	INT
2	DATA
3	CLK
4	RST
5	GND
6	VDO

Backlight Circuit:



Vf=9.6V(TYP). If=120mA

Blaze Display Technology Co.,Ltd.

DISPLAY TYPE:	7.0''TFT	DISPLAY DRIVER:	ILI5120-9G & ILI6150C-9G	PIXEL PITCH:	0.1506 X 0.1432 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X18),3串*6并
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	1024(RGB)X600 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST

DESIGNED BY: BDT-23	BDT-T7050-02-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2014-05-15