

Revised Record



1.0

New issue

2017-05-09

INTERFACE

1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E1
7	E2
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	N.C
17	LED-A
18	LED-K

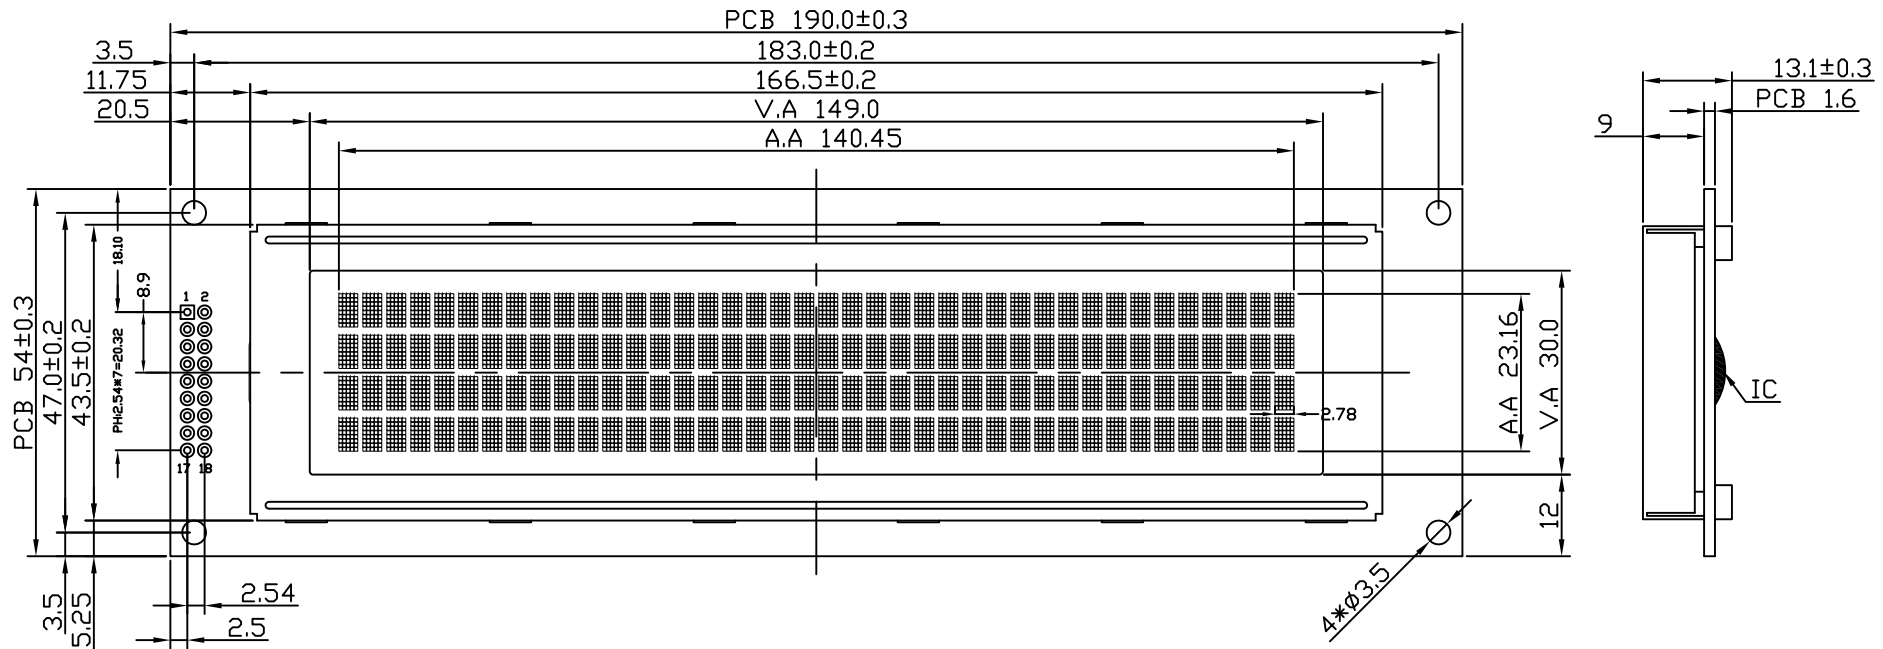

NOTES:

- 01. DISPLAY TYPE: STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=4.7V,VDD=5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/16DUTY,1/5BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: ST7066U(OR-EQV)
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED(WHITE,3PCS-LED*2,VF:5.0V,IF:90MA)
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-13	BCB4004-01B-SERIES	VERSION: 1.0
CHECKED BY: BDT-03		PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2017-05-09