


Revised Record

1.0

New issue

2014-07-23

INTERFACE	
1	VSS
2	VDD
3	V0
4	RS(CS)
5	RW(SID)
6	E(CLK)
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS1
16	/CS2
17	RST
18	/CS3
19	LED-A(3.3V)
20	LED-K(0V)

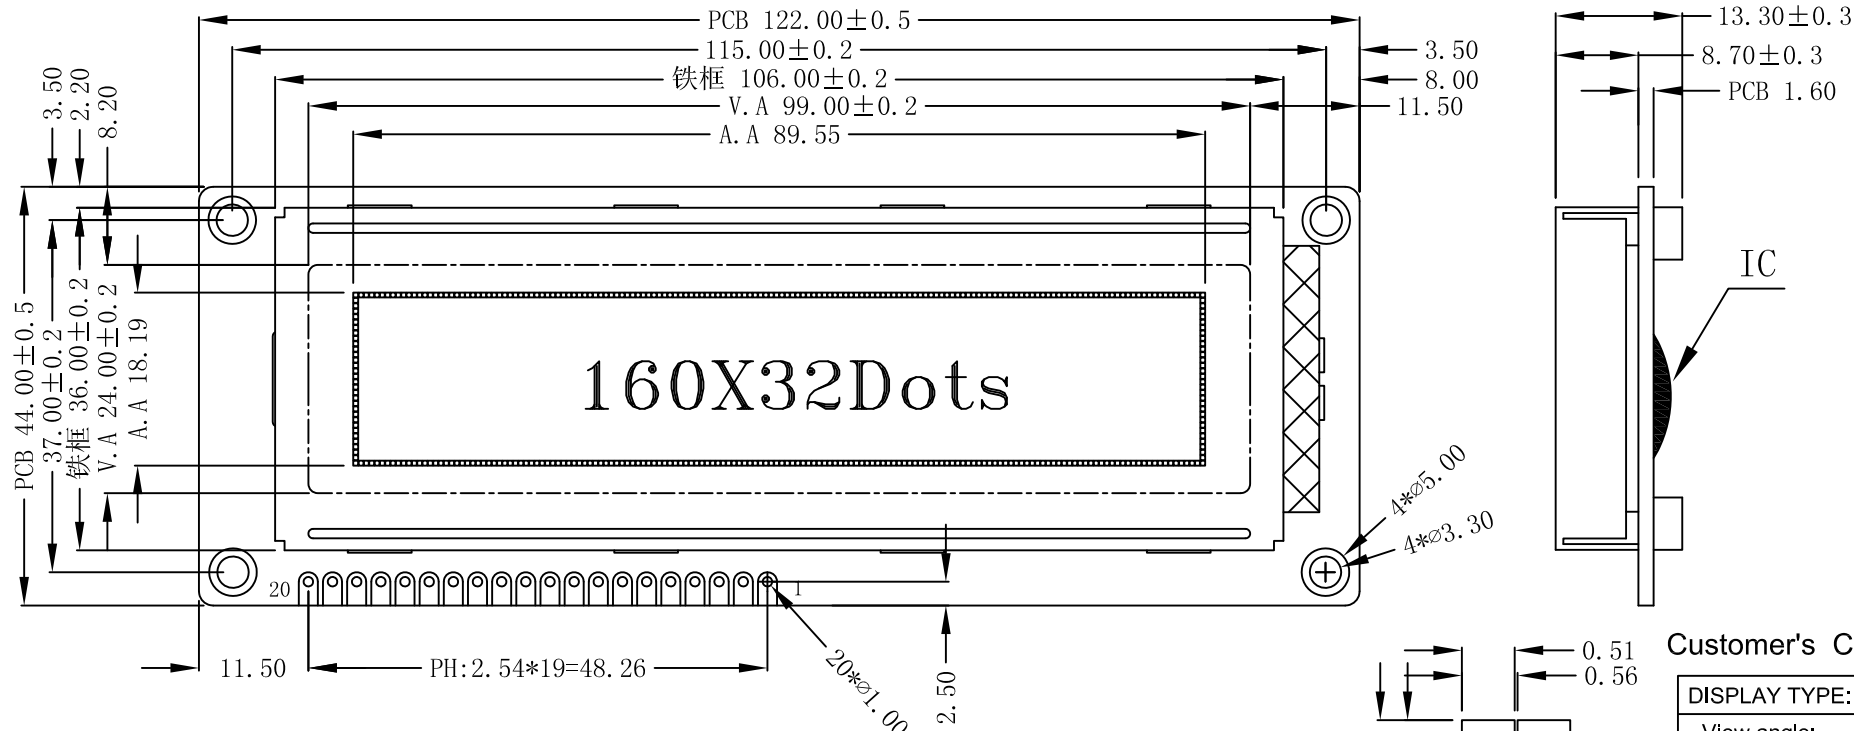

160X32Dots

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- 01. DISPLAY TYPE: STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=4.8V,VDD=3.0~5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/32DUTY,1/16BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: AIP31107+AIP31108
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED,WHITE,V=3.3V,I<40MA
- 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-22	BGB16032-06-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-04		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2014-07-23