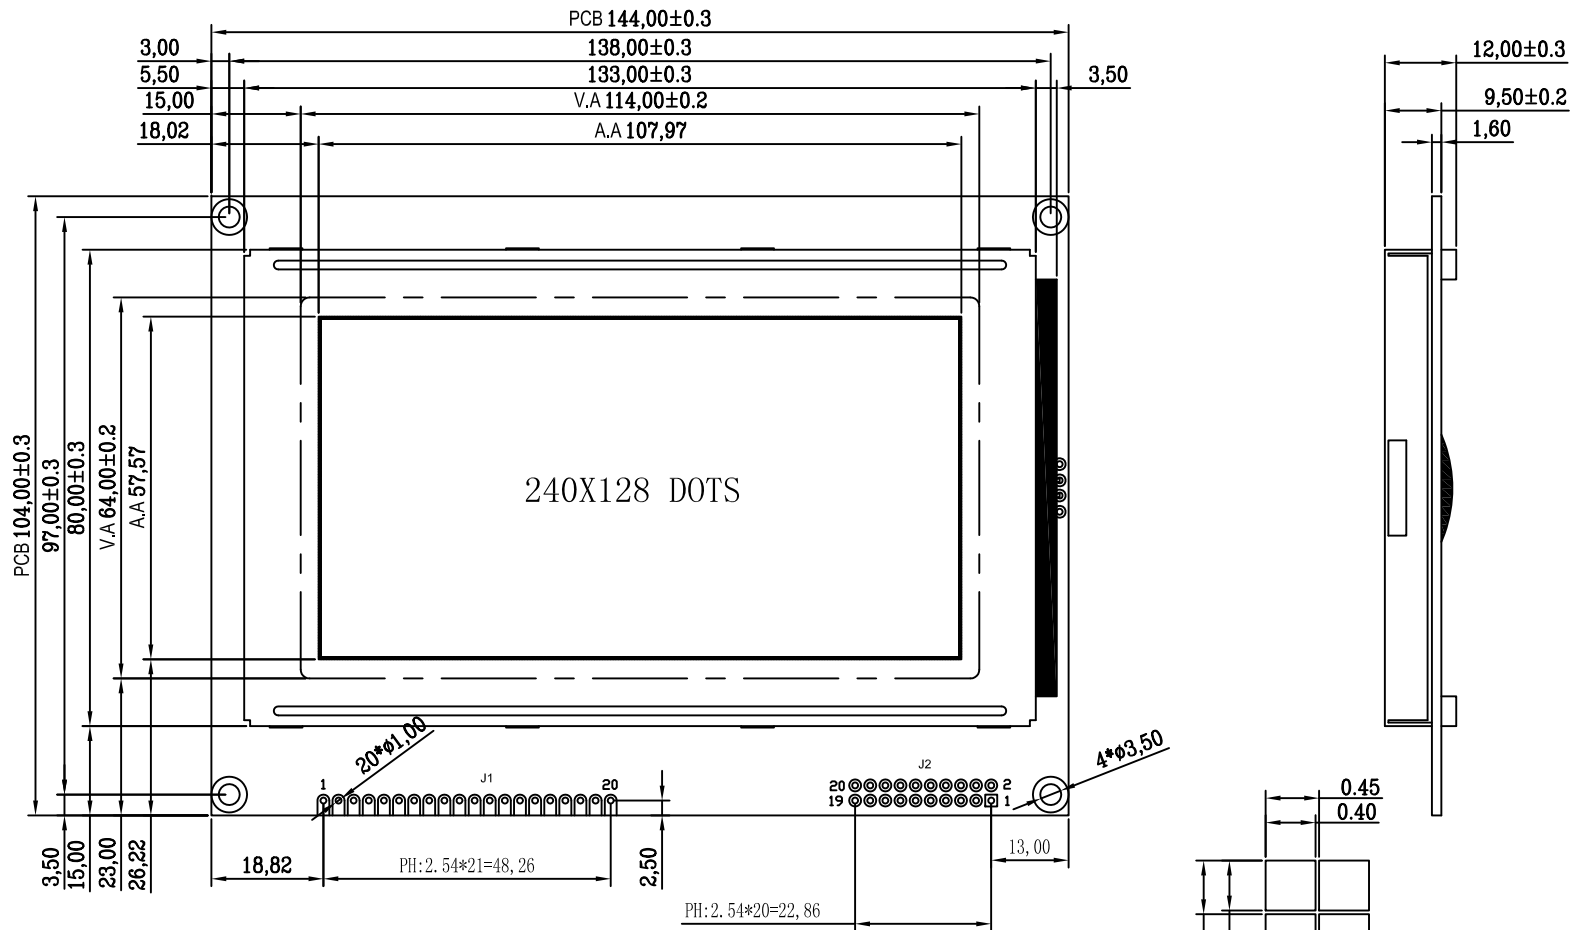


Revised Record	1.0	New issue	2013-03-05						
----------------	-----	-----------	------------	--	--	--	--	--	--



INTERFACE:			
J1		J2	
1	FG	1	FG
2	VSS	2	VSS
3	VCC(5V)	3	VCC(5V)
4	V0	4	V0
5	WR	5	WR
6	RD	6	RD
7	CS	7	CS
8	C/D	8	C/D
9	RST	9	VEE
10	DB0	10	RST
11	DB1	11	DB0
12	DB2	12	DB1
13	DB3	13	DB2
14	DB4	14	DB3
15	DB5	15	DB4
16	DB6	16	DB5
17	DB7	17	DB6
18	FS	18	DB7
19	LED+(5V)	19	FS
20	VEE	20	N.C



Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- |                            |                                     |
|----------------------------|-------------------------------------|
| 01. DISPLAY TYPE:          | STN-BLUE/NEGATIVE/TRANSMISSIVE RoHS |
| 02. OPERATING VOLTAGE:     | VOP=18.0V,VDD=5.0V                  |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C                         |
| 04. STORAGE TEMPERATURE:   | -30°C~+80°C                         |
| 05. DRIVE MODE:            | 1/128DUTY,1/12BIAS                  |
| 06. VIEWING DIRECTION:     | 6:00                                |
| 07. DRIVE IC:              | SAP1024B(OR-EQV)                    |
| 08. CONNECTOR:             | ZEBER                               |
| 09. BACKLIGHT:             | LED(WHITE),I=120MA                  |
| 10. CUSTOMER'S PART ID:    |                                     |

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-15	<b>BGB240128-03B</b>	VERSION: 1.0
CHECKED BY: BDT-05	 	PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2013-03-05