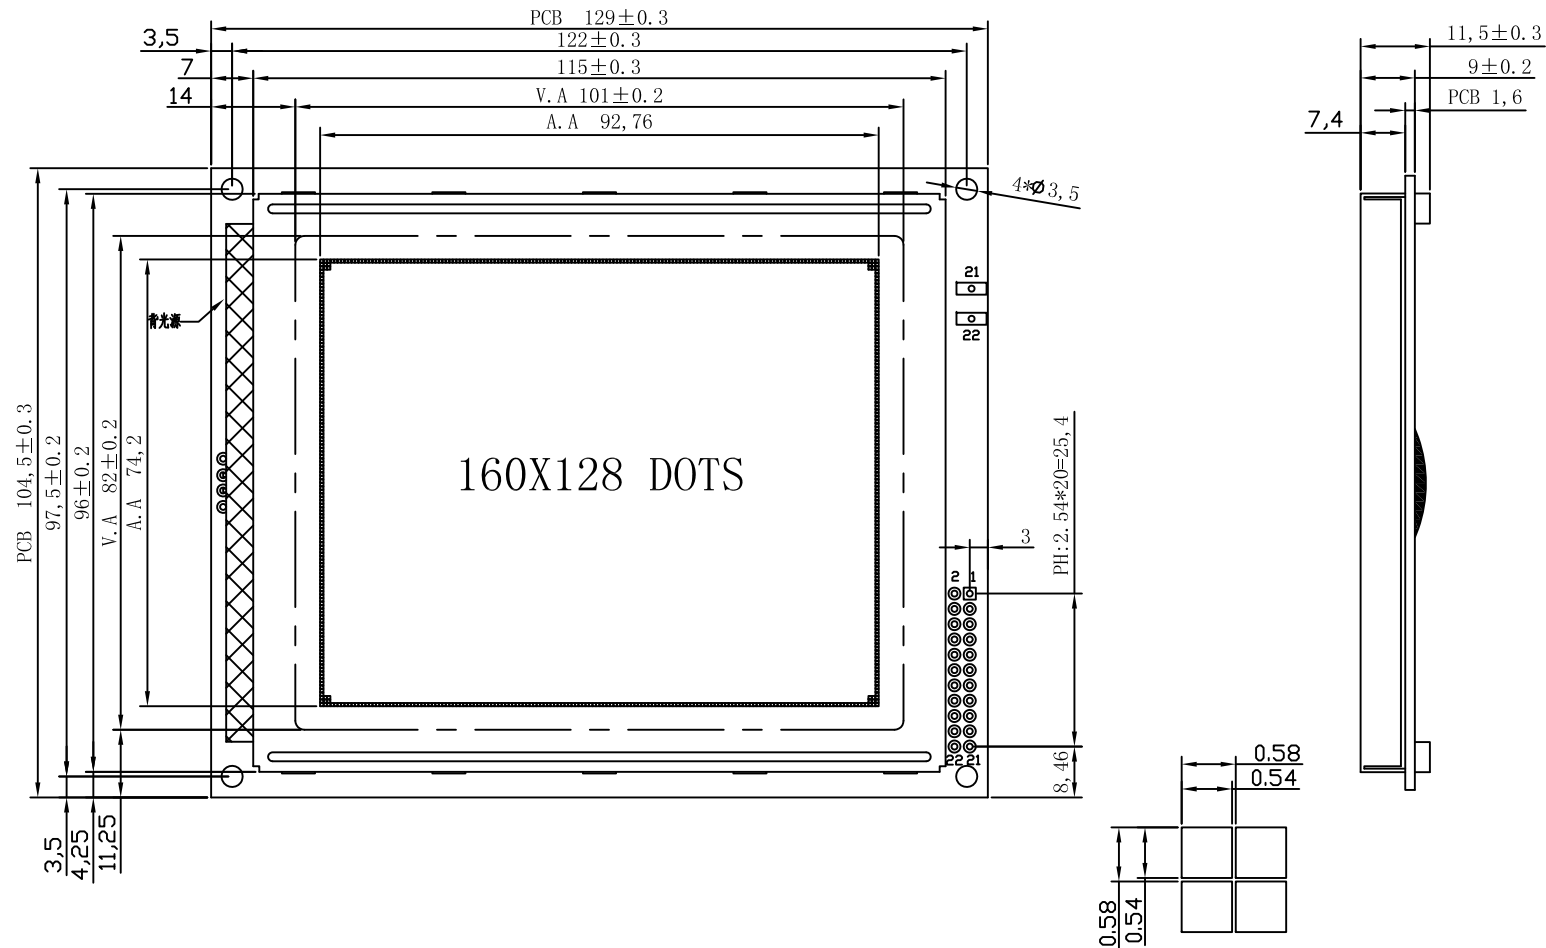


Revised Record	1.0	New issue	2012-11-10						
----------------	-----	-----------	------------	--	--	--	--	--	--



INTERFACE:	
1	FG
2	VSS
3	VCC(5V)
4	V0
5	WR
6	RD
7	CE
8	C/D
9	N.C
10	RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	VEE
21	LED+(5V)
22	LED-



Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- 01. DISPLAY TYPE: STN/NEGATIVE(BLUE)/TRANSMISSIVE RoHS
- 02. OPERATING VOLTAGE: VOP=16.0V,VDD=5.0V
- 03. OPERATING TEMPERATURE: -20°C~+70°C
- 04. STORAGE TEMPERATURE: -30°C~+80°C
- 05. DRIVE MODE: 1/128DUTY,1/12BIAS
- 06. VIEWING DIRECTION: 6:00
- 07. DRIVE IC: SAP1024B(OR-EQV)
- 08. CONNECTOR: ZEBER
- 09. BACKLIGHT: LED(WHITE)
- 10. CUSTOMER'S PART ID: BLAZE\_STANDARD\_PRODUCT

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23	<b>BGB160128-02A</b>	VERSION: 1.0
CHECKED BY: BDT-09	 	PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: <a href="http://www.blazedisplay.com">http://www.blazedisplay.com</a>		DATE: 2012-11-10