

Revised Record


1.0

New issue

2012-12-6

INTERFACE:

1	VSS
2	VCC(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	BLA(5V)
16	BLK

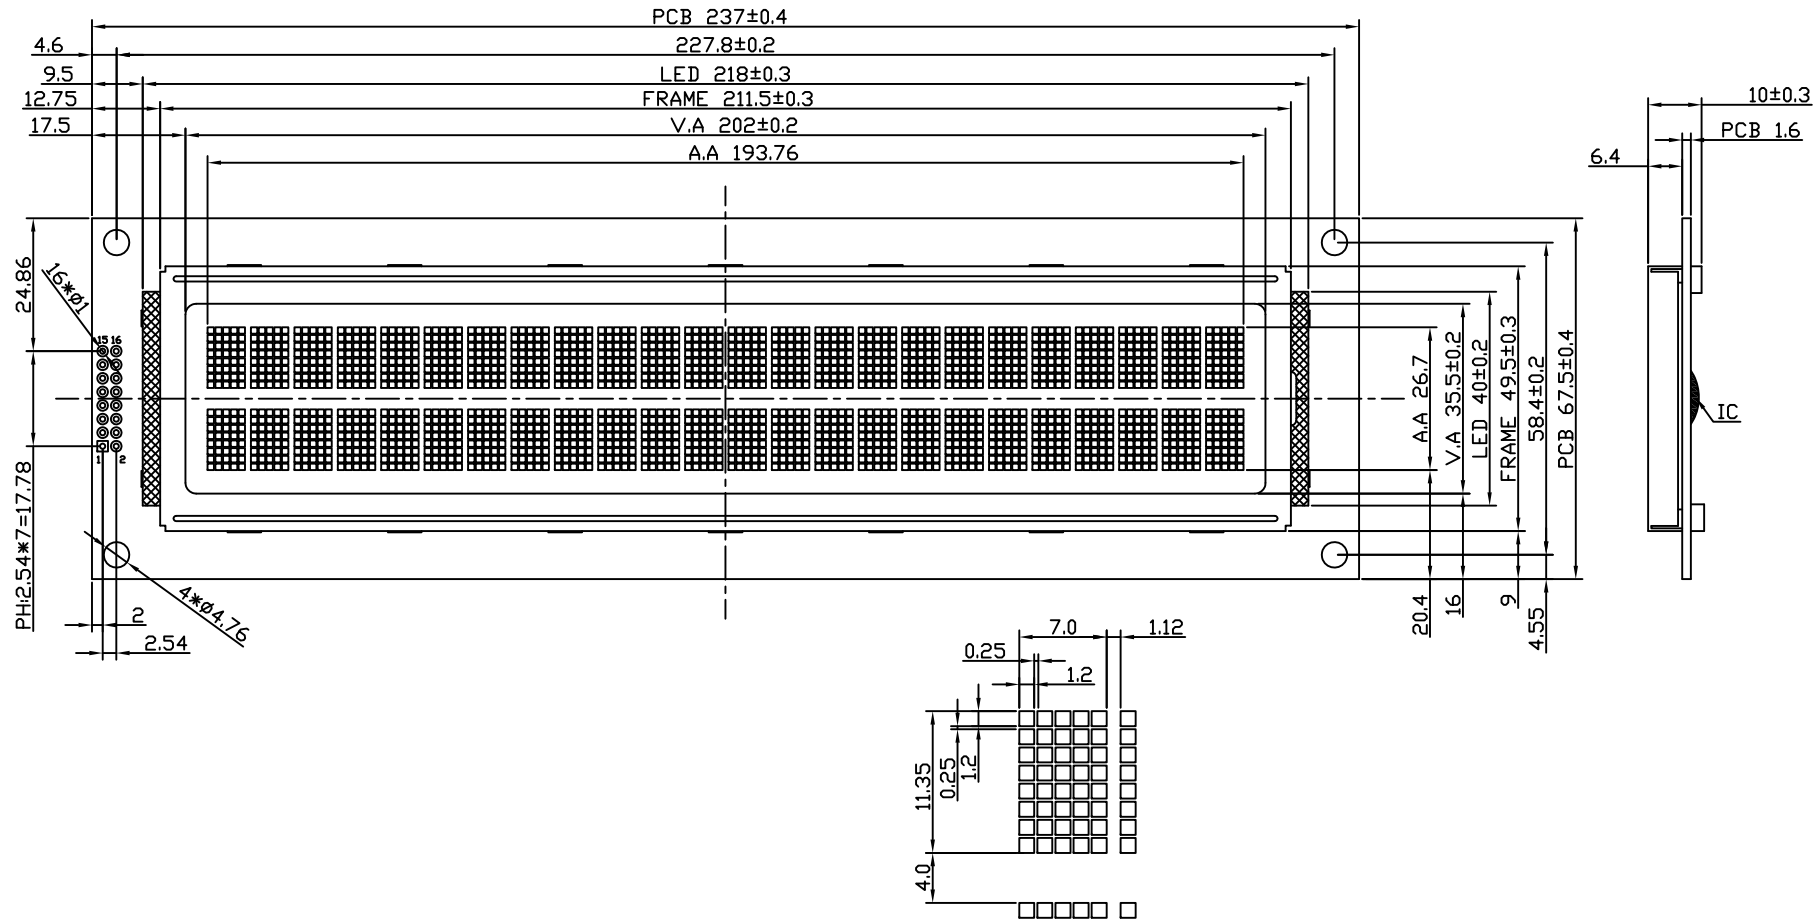

NOTES:

- | | |
|----------------------------|---------------------------------|
| 01. DISPLAY TYPE: | STN,BLUE/POSITIVE/TRANSFLECTIVE |
| 02. OPERATING VOLTAGE: | VOP=4.2V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | 0°C~+60°C |
| 04. STORAGE TEMPERATURE: | -20°C~+70°C |
| 05. DRIVE MODE: | 1/16DUTY,1/5BIAS |
| 06. VIEWING DIRECTION: | 12:00 |
| 07. DRIVE IC: | SPLC780D |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(WHITE,I=120MA) |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT |

RoHS


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24

BCB2402-C1_SERIES

VERSION: 1.0

CHECKED BY: BDT-06



PAGE 1 OF 1

APPROVED BY: BDT-02

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2012-12-6