

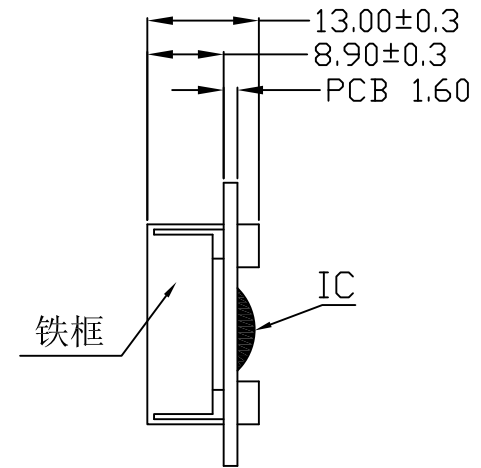


Revised Record

1.0 New Issue

2011-12-02


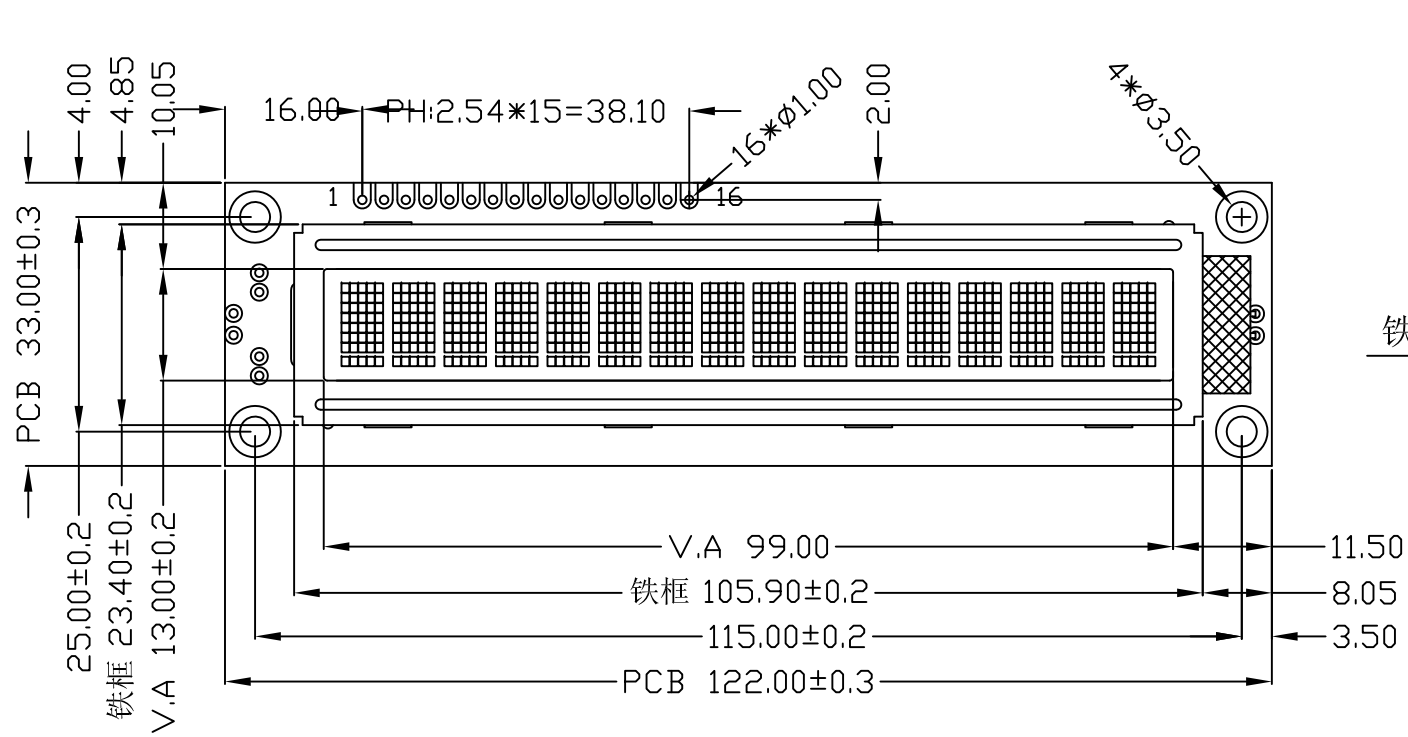


INTERFACE	
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

NOTES:

- | | |
|----------------------------|--------------------------------------|
| 01. DISPLAY TYPE: | STN(Y-G)/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VDD=5.0V, VOP=4.7V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/16DUTY, 1/5BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | SPLC780D or Eqv |
| 08. CONNECTOR: | ZEBRA |
| 09. BACKLIGHT: | LED YELLOW-GREEN |
| 10. CUSTOMER'S PART ID: | |

BLAZE Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-19	BCB1601-05-SERIES	VERSION: 1.0
CHECKED BY: BDT-08	 	PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2011-12-02