


Revised Record

1.0 New Issue

2013-07-02

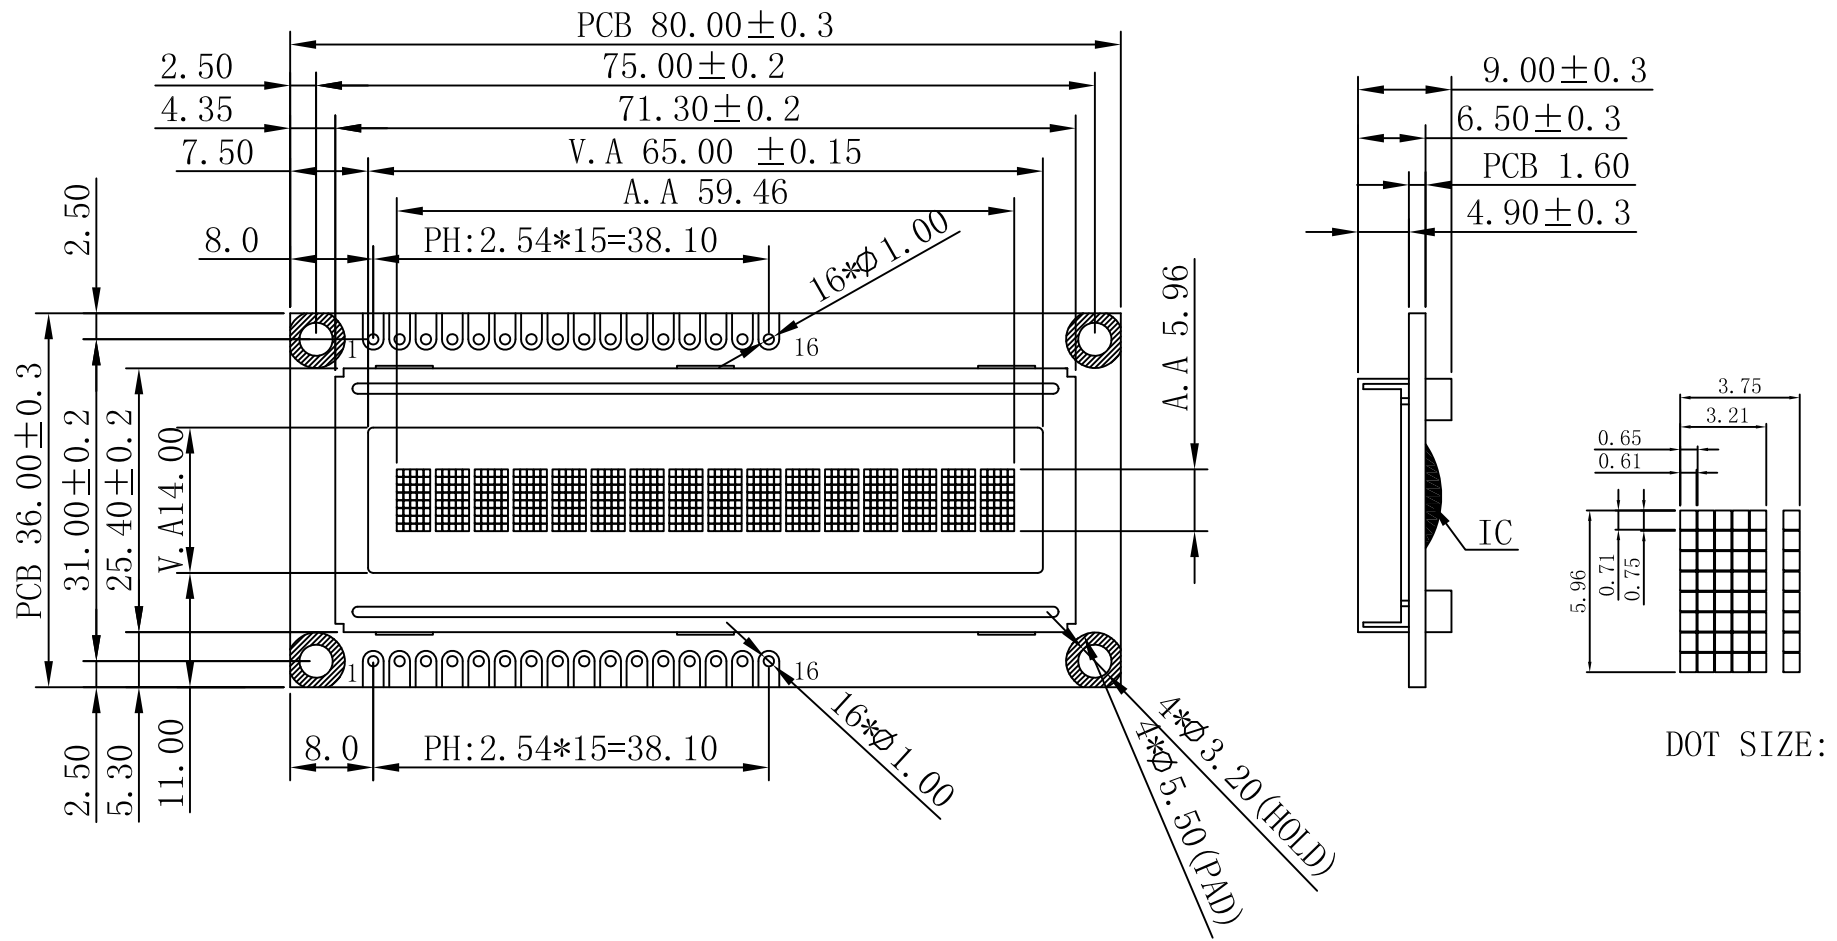

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	N.C
16	N.C

DOT SIZE:

NOTES:

- | | |
|----------------------------|-----------------------------------|
| 01. DISPLAY TYPE: | STN(Y-G)/POSITIVE/REFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VDD=5.0V,VOP=4.5V |
| 03. OPERATING TEMPERATURE: | -10°C~+60°C |
| 04. STORAGE TEMPERATURE: | -20°C~+70°C |
| 05. DRIVE MODE: | 1/16DUTY,1/5BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | AIP31066 or Eqv |
| 08. CONNECTOR: | Zebea |
| 09. BACKLIGHT: | |
| 10. CUSTOMER'S PART ID: | |


BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-16

BCB1601-04-SERIES

VERSION: 1.0

CHECKED BY: BDT-07



PAGE 1 OF 1

APPROVED BY: BDT-03

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2013-07-02